


48290599

RJ12 adaptor for 1A and 5A secondary CTs, 10000 A max. for 5A CT

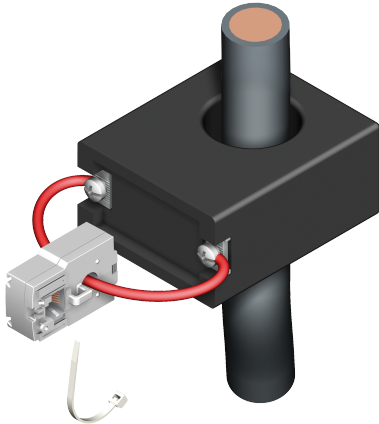

General characteristics

- Max primary current 2000 A /1 A or 10 000 A /5 A.

Compliance with standards

- IEC 61557-12
- UL

Access to resources (ex: manuals)



<https://www.socomec.co.uk/en-gb/reference/48290599>

With this adapter you can use a current transformer with a 1 A or 5 A output on DIRIS Digiware I, DIRIS B and DIRIS A-40.
For use with 5 A CTs (measurement up to 10 000 A) or a 1 A CTs (measurement up to 2000 A). The dimensions are the same as the TE-18.

Technical Characteristics

Model	TE
Opening	Diam.8,6
Rated current [A]	5
Secondary rated current	5
Function	Current measurement
Type of current	DC
Type of product	Solid core
Internal diameter	9
Secondary Output	Voltage
Accuracy class	0.5
Type of connection	RJ12
Conformity to standards	IEC 61557-12 UL 61010
Customisable	No

Classification

UNSPSC	83101808
ETIM Class	EC002048
IGCC	6042

Commerce

Effective date	2013-11-22
Offer Life Cycle Code	40
Country of origin	FR

ETIM - Electrical characteristics

Rated primary current [A]	5
Accuracy class	0.2
Overcurrent limiting factor	FS 10
Calibrated	Yes

ETIM - Mechanical characteristics

With contact protection	Yes
Opening diameter [mm]	8.6
Snap mounting	Yes
With copper rail	Yes
Secondary connection	Plug-in connection

ETIM - Technical features

Model	Other
Number of primary inputs	1

Logistics

GTIN/EAN	3596032776732
Customs number	8504409590
Price unit	PC
Weight of the packing unit [kg]	0.04

Length of the packing unit [m]	0.05
Width of the packing unit [m]	0.045
Depth of the packing unit [m]	0.015

Norms

Conformity to standards	IEC UL
-------------------------	-----------