

# Product datasheet

Specifications



## Linergy FT - Comb busbar - 63 A - 4 tap-offs - 45 mm pitch

Local distributor code:

23052145

GV2G445

EAN Code: 3389110555882

### Main

|                                             |                                               |
|---------------------------------------------|-----------------------------------------------|
| Range                                       | Linergy                                       |
| Product name                                | FT                                            |
| Device short name                           | GV2G                                          |
| Product or component type                   | Comb busbar                                   |
| Accessory / separate part category          | Connection accessory                          |
| Poles description                           | 3P                                            |
| Range compatibility                         | TeSys Deca<br>TeSys GV2<br>TeSys K<br>TeSys U |
| Fixing mode                                 | Terminals:                                    |
| Number of tap-offs                          | 4                                             |
| [Ith] conventional free air thermal current | 63 A                                          |

### Complementary

|                               |             |
|-------------------------------|-------------|
| Product certifications        | CE<br>cULus |
| [Ui] rated insulation voltage | 690 V       |
| Connection pitch              | 45 mm       |
| Width                         | 179 mm      |
| Product weight                | 0.077 kg    |

### Packing Units

|                              |           |
|------------------------------|-----------|
| Unit Type of Package 1       | PCE       |
| Number of Units in Package 1 | 1         |
| Package 1 Height             | 1.000 cm  |
| Package 1 Width              | 3.500 cm  |
| Package 1 Length             | 18.000 cm |
| Package 1 Weight             | 79.000 g  |
| Unit Type of Package 2       | S01       |
| Number of Units in Package 2 | 60        |
| Package 2 Height             | 15.000 cm |
| Package 2 Width              | 15.000 cm |
| Package 2 Length             | 40.000 cm |

Disclaimer: This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications

|                              |            |
|------------------------------|------------|
| Package 2 Weight             | 4.940 kg   |
| Unit Type of Package 3       | P06        |
| Number of Units in Package 3 | 1920       |
| Package 3 Height             | 75.000 cm  |
| Package 3 Width              | 60.000 cm  |
| Package 3 Length             | 80.000 cm  |
| Package 3 Weight             | 165.460 kg |

## Logistical informations

|                   |    |
|-------------------|----|
| Country of origin | RO |
|-------------------|----|

## Contractual warranty

|                      |    |
|----------------------|----|
| Warranty (in months) | 18 |
|----------------------|----|



## Environmental Data

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing “Use Better, Use Longer, Use Again” campaign to extend product lifetimes and recyclability.

[Environmental Data explained >](#)

[How we assess product sustainability >](#)



### Environmental footprint

Environmental Disclosure

[Product Environmental Profile](#)

## Use Better



### Materials and Substances

Packaging made with recycled cardboard

Yes

Packaging without single use plastic

No

EU RoHS Directive

[Compliant](#)

REACH Regulation

[Free of Substances of Very High Concern above the threshold](#)

## Use Longer



### Lifetime extension

Repair

No

## Use Again



### Repack and remanufacture

End of life manual availability

[End of Life Information](#)

Take-back

No


WEEE Label



The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins

Dimensions Drawings

Sets of Busbars GV2G445, GV2G454, GV2G472, with Terminal Block GV2G05

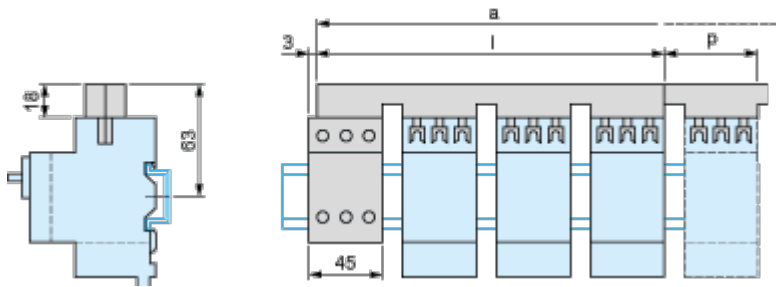

|                     | l   | p  |
|---------------------|-----|----|
| GV2G445 (4 x 45 mm) | 179 | 45 |
| GV2G454 (4 x 54 mm) | 206 | 54 |
| GV2G472 (4 x 72 mm) | 260 | 72 |

| Number of tap-offs | a   |     |     |     |
|--------------------|-----|-----|-----|-----|
|                    | 5   | 6   | 7   | 8   |
| GV2G445            | 224 | 269 | 314 | 359 |
| GV2G454            | 260 | 314 | 368 | 422 |
| GV2G472            | 332 | 404 | 476 | 548 |