

# Product datasheet

Specifications



## TeSys D contactor - 3P(3 NO) - AC-3 - <= 440 V 25 A - 24 V AC coil

Local distributor code:  
381803670 LC1D25B7

EAN Code: 3389110349658

### Main

|                                |                                                                                                                                                                             |
|--------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Range of product               | TeSys Deca                                                                                                                                                                  |
| Product or component type      | Contacteur                                                                                                                                                                  |
| Device short name              | LC1D                                                                                                                                                                        |
| Contacteur application         | Resistive load<br>Motor control                                                                                                                                             |
| Utilisation category           | AC-3<br>AC-3e<br>AC-1<br>AC-4                                                                                                                                               |
| Poles description              | 3P                                                                                                                                                                          |
| [Ue] rated operational voltage | Power circuit: <= 690 V AC 25...400 Hz<br>Power circuit: <= 300 V DC                                                                                                        |
| [Ie] rated operational current | 25 A (at <60 °C) at <= 440 V AC AC-3 for power circuit<br>40 A (at <60 °C) at <= 440 V AC AC-1 for power circuit<br>25 A (at <60 °C) at <= 440 V AC AC-3e for power circuit |
| [Uc] control circuit voltage   | 24 V AC 50/60 Hz                                                                                                                                                            |

### Complementary

|                                             |                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
|---------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Motor power kW                              | 5.5 kW at 220/230 V AC 50/60 Hz (AC-3)<br>11 kW at 380/400 V AC 50/60 Hz (AC-3)<br>11 kW at 415/440 V AC 50/60 Hz (AC-3)<br>15 kW at 500 V AC 50/60 Hz (AC-3)<br>15 kW at 660/690 V AC 50/60 Hz (AC-3)<br>5.5 kW at 220/230 V AC 50/60 Hz (AC-3e)<br>11 kW at 380/400 V AC 50/60 Hz (AC-3e)<br>11 kW at 415/440 V AC 50/60 Hz (AC-3e)<br>15 kW at 500 V AC 50/60 Hz (AC-3e)<br>15 kW at 660/690 V AC 50/60 Hz (AC-3e)<br>5.5 kW at 400 V AC 50/60 Hz (AC-4) |
| Motor power hp                              | 3 hp at 230/240 V AC 50/60 Hz for 1 phase motors<br>2 hp at 115 V AC 50/60 Hz for 1 phase motors<br>7.5 hp at 230/240 V AC 50/60 Hz for 3 phases motors<br>15 hp at 460/480 V AC 50/60 Hz for 3 phases motors<br>20 hp at 575/600 V AC 50/60 Hz for 3 phases motors<br>7.5 hp at 200/208 V AC 50/60 Hz for 3 phases motors                                                                                                                                  |
| Compatibility code                          | LC1D                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| Pole contact composition                    | 3 NO                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| Protective cover                            | With                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| [Ith] conventional free air thermal current | 10 A (at 60 °C) for signalling circuit<br>40 A (at 60 °C) for power circuit                                                                                                                                                                                                                                                                                                                                                                                 |
| Irms rated making capacity                  | 140 A AC for signalling circuit conforming to IEC 60947-5-1<br>250 A DC for signalling circuit conforming to IEC 60947-5-1<br>450 A at 440 V for power circuit conforming to IEC 60947                                                                                                                                                                                                                                                                      |
| Rated breaking capacity                     | 450 A at 440 V for power circuit conforming to IEC 60947                                                                                                                                                                                                                                                                                                                                                                                                    |

Disclaimer: This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications

|                                                 |                                                                                                                                                                                                                                                                                       |
|-------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>[Icw] rated short-time withstand current</b> | 240 A 40 °C - 10 s for power circuit<br>380 A 40 °C - 1 s for power circuit<br>50 A 40 °C - 10 min for power circuit<br>120 A 40 °C - 1 min for power circuit<br>100 A - 1 s for signalling circuit<br>120 A - 500 ms for signalling circuit<br>140 A - 100 ms for signalling circuit |
| <b>Associated fuse rating</b>                   | 10 A gG for signalling circuit conforming to IEC 60947-5-1<br>63 A gG at <= 690 V coordination type 1 for power circuit<br>40 A gG at <= 690 V coordination type 2 for power circuit                                                                                                  |
| <b>Average impedance</b>                        | 2 mOhm - lth 40 A 50 Hz for power circuit                                                                                                                                                                                                                                             |
| <b>Power dissipation per pole</b>               | 3.2 W AC-1<br>1.25 W AC-3<br>1.25 W AC-3e                                                                                                                                                                                                                                             |
| <b>[Ui] rated insulation voltage</b>            | Power circuit: 690 V conforming to IEC 60947-4-1<br>Power circuit: 600 V CSA certified<br>Power circuit: 600 V UL certified<br>Signalling circuit: 690 V conforming to IEC 60947-1<br>Signalling circuit: 600 V CSA certified<br>Signalling circuit: 600 V UL certified               |
| <b>Overvoltage category</b>                     | III                                                                                                                                                                                                                                                                                   |
| <b>Pollution degree</b>                         | 3                                                                                                                                                                                                                                                                                     |
| <b>[Uimp] rated impulse withstand voltage</b>   | 6 kV conforming to IEC 60947                                                                                                                                                                                                                                                          |
| <b>Safety reliability level</b>                 | B10d = 1369863 cycles contactor with nominal load conforming to EN/ISO 13849-1<br>B10d = 20000000 cycles contactor with mechanical load conforming to EN/ISO 13849-1                                                                                                                  |
| <b>Mechanical durability</b>                    | 15 Mcycles                                                                                                                                                                                                                                                                            |
| <b>Electrical durability</b>                    | 1.65 Mcycles 25 A AC-3 at Ue <= 440 V<br>1.4 Mcycles 40 A AC-1 at Ue <= 440 V<br>1.65 Mcycles 25 A AC-3e at Ue <= 440 V                                                                                                                                                               |
| <b>Control circuit type</b>                     | AC at 50/60 Hz standard                                                                                                                                                                                                                                                               |
| <b>Coil technology</b>                          | Without built-in suppressor module                                                                                                                                                                                                                                                    |
| <b>Control circuit voltage limits</b>           | 0.3...0.6 Uc (-40...70 °C):drop-out AC 50/60 Hz<br>0.8...1.1 Uc (-40...60 °C):operational AC 50 Hz<br>0.85...1.1 Uc (-40...60 °C):operational AC 60 Hz<br>1...1.1 Uc (60...70 °C):operational AC 50/60 Hz                                                                             |
| <b>Inrush power in VA</b>                       | 70 VA 60 Hz cos phi 0.75 (at 20 °C)<br>70 VA 50 Hz cos phi 0.75 (at 20 °C)                                                                                                                                                                                                            |
| <b>Hold-in power consumption in VA</b>          | 7.5 VA 60 Hz cos phi 0.3 (at 20 °C)<br>7 VA 50 Hz cos phi 0.3 (at 20 °C)                                                                                                                                                                                                              |
| <b>Heat dissipation</b>                         | 2...3 W at 50/60 Hz                                                                                                                                                                                                                                                                   |
| <b>Operating time</b>                           | 12...22 ms closing<br>4...19 ms opening                                                                                                                                                                                                                                               |
| <b>Maximum operating rate</b>                   | 3600 cyc/h at 60 °C                                                                                                                                                                                                                                                                   |

|                               |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
|-------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Connections - terminals       | Control circuit: screw clamp terminals 1 1...4 mm² - cable stiffness: flexible without cable end<br>Control circuit: screw clamp terminals 2 1...4 mm² - cable stiffness: flexible without cable end<br>Control circuit: screw clamp terminals 1 1...4 mm² - cable stiffness: flexible with cable end<br>Control circuit: screw clamp terminals 2 1...2.5 mm² - cable stiffness: flexible with cable end<br>Control circuit: screw clamp terminals 1 1...4 mm² - cable stiffness: solid without cable end<br>Control circuit: screw clamp terminals 2 1...4 mm² - cable stiffness: solid without cable end<br>Power circuit: screw clamp terminals 1 2.5...10 mm² - cable stiffness: flexible without cable end<br>Power circuit: screw clamp terminals 2 2.5...10 mm² - cable stiffness: flexible without cable end<br>Power circuit: screw clamp terminals 1 1...10 mm² - cable stiffness: flexible with cable end<br>Power circuit: screw clamp terminals 2 1.5...6 mm² - cable stiffness: flexible with cable end<br>Power circuit: screw clamp terminals 1 1.5...10 mm² - cable stiffness: solid without cable end<br>Power circuit: screw clamp terminals 2 2.5...10 mm² - cable stiffness: solid without cable end |
| Tightening torque             | Control circuit: 1.7 N.m - on screw clamp terminals - with screwdriver flat Ø 6 mm<br>Control circuit: 1.7 N.m - on screw clamp terminals - with screwdriver Philips No 2<br>Power circuit: 2.5 N.m - on screw clamp terminals - with screwdriver flat Ø 6 mm<br>Power circuit: 2.5 N.m - on screw clamp terminals - with screwdriver Philips No 2<br>Control circuit: 1.7 N.m - on screw clamp terminals - with screwdriver pozidriv No 2<br>Power circuit: 2.5 N.m - on screw clamp terminals - with screwdriver pozidriv No 2                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| Auxiliary contact composition | 1 NO + 1 NC                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| Auxiliary contacts type       | type mechanically linked 1 NO + 1 NC conforming to IEC 60947-5-1<br>type mirror contact 1 NC conforming to IEC 60947-4-1                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| Signalling circuit frequency  | 25...400 Hz                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| Minimum switching voltage     | 17 V for signalling circuit                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| Minimum switching current     | 5 mA for signalling circuit                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| Insulation resistance         | > 10 MOhm for signalling circuit                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| Non-overlap time              | 1.5 ms on de-energisation between NC and NO contact<br>1.5 ms on energisation between NC and NO contact                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| Mounting support              | Plate<br>Rail                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |

## Environment

|                         |                                                                                                                                                                                                             |
|-------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Standards               | CSA C22.2 No 14<br>EN 60947-4-1<br>EN 60947-5-1<br>IEC 60947-4-1<br>IEC 60947-5-1<br>UL 60947-4-1<br>IEC 60335-1:Clause 30.2<br>IEC 60335-2-40:Annex JJ<br>UL 60335-2-40:Annex JJ<br>CSA C22.2 No 60947-4-1 |
| Product certifications  | UL<br>CCC<br>CSA<br>Marine<br>UKCA<br>EAC<br>CB Scheme                                                                                                                                                      |
| IP degree of protection | IP20 front face conforming to IEC 60529                                                                                                                                                                     |
| Protective treatment    | TH conforming to IEC 60068-2-30                                                                                                                                                                             |
| Climatic withstand      | conforming to IACS E10 exposure to damp heat<br>conforming to IEC 60947-1 Annex Q category D exposure to damp heat                                                                                          |

|                                                       |                                                                                                                                                                                       |
|-------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Permissible ambient air temperature around the device | -40...60 °C<br>60...70 °C with derating                                                                                                                                               |
| Operating altitude                                    | 0...3000 m                                                                                                                                                                            |
| Fire resistance                                       | 850 °C conforming to IEC 60695-2-1                                                                                                                                                    |
| Flame retardance                                      | V1 conforming to UL 94                                                                                                                                                                |
| Mechanical robustness                                 | Vibrations contactor open (2 Gn, 5...300 Hz)<br>Vibrations contactor closed (4 Gn, 5...300 Hz)<br>Shocks contactor closed (15 Gn for 11 ms)<br>Shocks contactor open (8 Gn for 11 ms) |
| Height                                                | 85 mm                                                                                                                                                                                 |
| Width                                                 | 45 mm                                                                                                                                                                                 |
| Depth                                                 | 92 mm                                                                                                                                                                                 |
| Product weight                                        | 0.37 kg                                                                                                                                                                               |

## Packing Units

|                              |            |
|------------------------------|------------|
| Unit Type of Package 1       | PCE        |
| Number of Units in Package 1 | 1          |
| Package 1 Height             | 5.000 cm   |
| Package 1 Width              | 9.200 cm   |
| Package 1 Length             | 11.200 cm  |
| Package 1 Weight             | 404.000 g  |
| Unit Type of Package 2       | S02        |
| Number of Units in Package 2 | 20         |
| Package 2 Height             | 15.000 cm  |
| Package 2 Width              | 30.000 cm  |
| Package 2 Length             | 40.000 cm  |
| Package 2 Weight             | 8.395 kg   |
| Unit Type of Package 3       | P06        |
| Number of Units in Package 3 | 320        |
| Package 3 Height             | 75.000 cm  |
| Package 3 Width              | 60.000 cm  |
| Package 3 Length             | 80.000 cm  |
| Package 3 Weight             | 145.600 kg |

## Logistical informations

|                   |    |
|-------------------|----|
| Country of origin | FR |
|-------------------|----|

## Contractual warranty

|                      |    |
|----------------------|----|
| Warranty (in months) | 18 |
|----------------------|----|



## Environmental Data

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing “Use Better, Use Longer, Use Again” campaign to extend product lifetimes and recyclability.

[Environmental Data explained >](#)

[How we assess product sustainability >](#)



### Environmental footprint

|                                                        |                                               |
|--------------------------------------------------------|-----------------------------------------------|
| Total lifecycle Carbon footprint                       | 127 kg CO2 eq.                                |
| Carbon footprint of the manufacturing phase [A1 to A3] | 2 kg CO2 eq.                                  |
| Carbon footprint of the distribution phase [A4]        | 0.2 kg CO2 eq.                                |
| Carbon footprint of the use phase [B2, B3, B4, B6]     | 123 kg CO2 eq.                                |
| Carbon footprint of the end-of-life phase [C1 to C4]   | 0.9 kg CO2 eq.                                |
| Environmental Disclosure                               | <a href="#">Product Environmental Profile</a> |

## Use Better



### Materials and Substances

|                                        |                                                                             |
|----------------------------------------|-----------------------------------------------------------------------------|
| Packaging made with recycled cardboard | Yes                                                                         |
| Packaging without single use plastic   | Yes                                                                         |
| EU RoHS Directive                      | <a href="#">Compliant</a>                                                   |
| REACH Regulation                       | <a href="#">Free of Substances of Very High Concern above the threshold</a> |
| PVC free                               | Yes                                                                         |

## Use Longer



### Lifetime extension

|        |    |
|--------|----|
| Repair | No |
|--------|----|

## Use Again




### Repack and remanufacture

|                                 |                                                                                                                                                                                                                 |
|---------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Recyclability potential, in %   | 66                                                                                                                                                                                                              |
| End of life manual availability | <a href="#">End of Life Information</a>                                                                                                                                                                         |
| Take-back                       | No                                                                                                                                                                                                              |
| WEEE Label                      |  The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins |

Dimensions Drawings

Dimensions

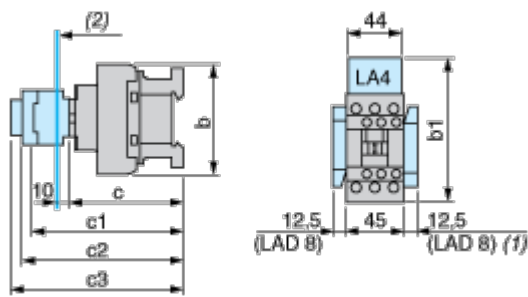


- (1) Including LAD 4BB
- (2) Minimum electrical clearance

| LC1 |                                    | D25...D38 (3-pole) |
|-----|------------------------------------|--------------------|
| b   | without add-on blocks              | 85                 |
| b1  | with LAD 4BB                       | 98                 |
|     | with LA4 D•2                       | 114 <sup>(1)</sup> |
|     | with LA4 DF, DT                    | 123 <sup>(1)</sup> |
|     | with LA4 DW, DL                    | 130 <sup>(1)</sup> |
| c   | without cover or add-on blocks     | 90                 |
|     | with cover, without add-on blocks  | 92                 |
| c1  | with LAD N or C (2 or 4 contacts)  | 123                |
| c2  | with LA6 DK10, LAD 6K10            | 135                |
| c3  | with LAD T, R, S                   | 143                |
|     | with LAD T, R, S and sealing cover | 147                |
| (1) | Including LAD 4BB.                 |                    |

Connections and Schema

Wiring



Offer Marketing Illustration

Product benefits / Features



The image shows a TeSys Deca Contactor, a black industrial electrical component. It has a green label with 'TeSys' and 'Schneider Electric' logos. The label also indicates 'Control' and 'LC1 D09'. The top of the unit has three terminals labeled '1', '3', and '5'. The bottom has terminals labeled '14', '15', '16', '17', '18', and '19'. The unit is shown against a green circular background.

### TeSys Deca Contactors

#### Technical Benefits

- Deca green delivers a consistent low consumption range of contactors from 9 A to 80 A.
- Covers control voltage from 24 to 250 V, with same coils for AC and DC.
- Designed to meet the requirements of industrial and HVAC applications
- With IEC60335-1 compliance, improved fire resistance, and dust-proof auxiliaries
- Suitable for safety applications thanks to mechanically linked contacts and mirror contacts
- Outstanding breaking/making capacity up to 20 In with PLC direct connection



Offer Marketing Illustration

Product benefits / Features



Offer Marketing Illustration

Product benefits / Features

### TeSys Deca

Contactors



**Reliable**

Multi-standard solutions, high reliability, long mechanical and electrical durability for different sizes, and the most complete accessories.



**Energy efficiency**

These electronic-coil contactors require up to 80 % less energy than electro-mechanical contactors.



**Universal**

Multi standards certified (IEC, UL, CSA, CCC, EAC, Marine), Green Premium compliant (RoHS/REACH).

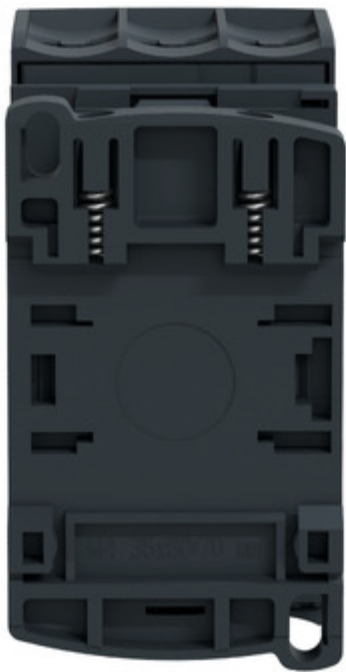


Image of product / Alternate images

Alternative

---





Technical Illustration

Assembly's dimensions

---

