

Damper actuator for adjusting dampers in technical building installations

- Air damper size up to approx. 1 m<sup>2</sup>
- Torque motor 5 Nm
- Nominal voltage AC/DC 24 V
- Control Open/close, 3-point
- with connecting terminals
- with integrated auxiliary switch



Picture may differ from product

## Technical data

|                        |                                          |                                                                                                                                                                           |
|------------------------|------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Electrical data</b> | Nominal voltage                          | AC/DC 24 V                                                                                                                                                                |
|                        | Nominal voltage frequency                | 50/60 Hz                                                                                                                                                                  |
|                        | Nominal voltage range                    | AC 19.2...28.8 V / DC 19.2...28.8 V                                                                                                                                       |
|                        | Power consumption in operation           | 1 W                                                                                                                                                                       |
|                        | Power consumption in rest position       | 0.2 W                                                                                                                                                                     |
|                        | Power consumption for wire sizing        | 1.5 VA                                                                                                                                                                    |
|                        | Auxiliary switch                         | 1x SPDT, 0...100%                                                                                                                                                         |
|                        | Switching capacity auxiliary switch      | 1 mA...3 A (0.5 A inductive), DC 5 V...AC 250 V                                                                                                                           |
|                        | Connection supply / control              | Terminals 4 mm <sup>2</sup> (cable ø4...10 mm, 3-wire)                                                                                                                    |
|                        | Connection auxiliary switch              | Terminals 4 mm <sup>2</sup> (cable ø4...10 mm, 3-wire)                                                                                                                    |
|                        | Parallel operation                       | Yes (note the performance data)                                                                                                                                           |
| <b>Functional data</b> | Torque motor                             | 5 Nm                                                                                                                                                                      |
|                        | Direction of motion motor                | selectable with switch 0 (ccw rotation) / 1 (cw rotation)                                                                                                                 |
|                        | Manual override                          | with push-button, can be locked                                                                                                                                           |
|                        | Angle of rotation                        | Max. 95°                                                                                                                                                                  |
|                        | Angle of rotation note                   | can be limited on both sides with adjustable mechanical end stops                                                                                                         |
|                        | Running time motor                       | 150 s / 90°                                                                                                                                                               |
|                        | Sound power level, motor                 | 35 dB(A)                                                                                                                                                                  |
|                        | Mechanical interface                     | Universal shaft clamp 6...20 mm                                                                                                                                           |
|                        | Position indication                      | Mechanical, pluggable                                                                                                                                                     |
| <b>Safety data</b>     | Protection class IEC/EN                  | III, Safety Extra-Low Voltage (SELV)                                                                                                                                      |
|                        | Power source UL                          | Class 2 Supply                                                                                                                                                            |
|                        | Protection class auxiliary switch IEC/EN | II, reinforced insulation                                                                                                                                                 |
|                        | Degree of protection IEC/EN              | IP54                                                                                                                                                                      |
|                        | Degree of protection NEMA/UL             | NEMA 2                                                                                                                                                                    |
|                        | Housing                                  | UL Enclosure Type 2                                                                                                                                                       |
|                        | EMC                                      | CE according to 2014/30/EU                                                                                                                                                |
|                        | Low voltage directive                    | CE according to 2014/35/EU                                                                                                                                                |
|                        | Certification IEC/EN                     | IEC/EN 60730-1 and IEC/EN 60730-2-14                                                                                                                                      |
|                        | UL Approval                              | cULus according to UL60730-1A, UL60730-2-14 and CAN/CSA E60730-1<br>The UL marking on the actuator depends on the production site, the device is UL-compliant in any case |
|                        | Hygiene test                             | According to VDI 6022 Part 1                                                                                                                                              |
|                        | Type of action                           | Type 1.B                                                                                                                                                                  |
|                        | Rated impulse voltage supply / control   | 0.8 kV                                                                                                                                                                    |

## Technical data

|             |                                        |                             |
|-------------|----------------------------------------|-----------------------------|
| Safety data | Rated impulse voltage auxiliary switch | 2.5 kV                      |
|             | Pollution degree                       | 3                           |
|             | Ambient humidity                       | Max. 95% RH, non-condensing |
|             | Ambient temperature                    | -30...50°C [-22...122°F]    |
|             | Storage temperature                    | -40...80°C [-40...176°F]    |
|             | Servicing                              | maintenance-free            |
| Weight      | Weight                                 | 0.43 kg                     |

## Safety notes



- This device has been designed for use in stationary heating, ventilation and air-conditioning systems and must not be used outside the specified field of application, especially in aircraft or in any other airborne means of transport.
- Outdoor application: Only possible if no (sea) water, snow, ice, sunlight or aggressive gases act directly on the device and if it is ensured that the ambient conditions remain within the limit values specified in the data sheet at all times.
- Only authorised specialists may carry out installation. All applicable legal or institutional installation regulations must be complied with during installation.
- The device may only be opened at the manufacturer's site. It does not contain any parts that can be replaced or repaired by the user.
- To calculate the torque required, the specifications supplied by the damper manufacturers concerning the cross-section and the design, as well as the installation situation and the ventilation conditions must be observed.
- The device contains electrical and electronic components and must not be disposed of as household refuse. All locally valid regulations and requirements must be observed.

## Product features

|                              |                                                                                                                                                          |
|------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------|
| Simple direct mounting       | Simple direct mounting on the damper shaft with a universal shaft clamp, supplied with an anti-rotation mechanism to prevent the actuator from rotating. |
| Manual override              | Manual override with push-button possible (the gear train is disengaged for as long as the button is pressed or remains locked).                         |
| Adjustable angle of rotation | Adjustable angle of rotation with mechanical end stops.                                                                                                  |
| High functional reliability  | The actuator is overload protected, requires no limit switches and automatically stops when the end stop is reached.                                     |
| Flexible signalling          | With adjustable auxiliary switch (0...100%)                                                                                                              |

## Accessories

| Electrical accessories | Description                                                         | Type     |
|------------------------|---------------------------------------------------------------------|----------|
|                        | Auxiliary switch 1x SPDT add-on                                     | S1A      |
|                        | Auxiliary switch 2x SPDT add-on                                     | S2A      |
|                        | Feedback potentiometer 140 Ω add-on                                 | P140A    |
|                        | Feedback potentiometer 1 kΩ add-on                                  | P1000A   |
|                        | Feedback potentiometer 10 kΩ add-on                                 | P10000A  |
| Mechanical accessories | Description                                                         | Type     |
|                        | Shaft extension 170 mm ø10 mm for damper shaft ø6...16 mm           | AV6-20   |
|                        | Shaft clamp one-sided, clamping range ø6...20 mm, Multipack 20 pcs. | K-ELA    |
|                        | Shaft clamp one-sided, clamping range ø6...10 mm, Multipack 20 pcs. | K-ELA10  |
|                        | Shaft clamp one-sided, clamping range ø6...13 mm, Multipack 20 pcs. | K-ELA13  |
|                        | Shaft clamp one-sided, clamping range ø6...16 mm, Multipack 20 pcs. | K-ELA16  |
|                        | Anti-rotation mechanism 180 mm, Multipack 20 pcs.                   | Z-ARS180 |
|                        | Form fit insert 8x8 mm, Multipack 20 pcs.                           | ZF8-LMA  |
|                        | Form fit insert 10x10 mm, Multipack 20 pcs.                         | ZF10-LMA |
|                        | Form fit insert 12x12 mm, Multipack 20 pcs.                         | ZF12-LMA |

## Accessories

| Description                                                                                        | Type       |
|----------------------------------------------------------------------------------------------------|------------|
| Form fit insert 8x8 mm, with angle of rotation limiter and position indicator, Multipack 20 pcs.   | ZFRL8-LMA  |
| Form fit insert 10x10 mm, with angle of rotation limiter and position indicator, Multipack 20 pcs. | ZFRL10-LMA |
| Form fit insert 12x12 mm, with angle of rotation limiter and position indicator, Multipack 20 pcs. | ZFRL12-LMA |
| Position indicator, Multipack 20 pcs.                                                              | Z-PI       |
| Terminal protection IP54, Multipack 20 pcs.                                                        | Z-TP       |


## Electrical installation




Supply from isolating transformer.

Parallel connection of other actuators possible. Observe the performance data.



AC/DC 24 V, open/close




AC/DC 24 V, 3-point



Auxiliary switch



## Operating controls and indicators

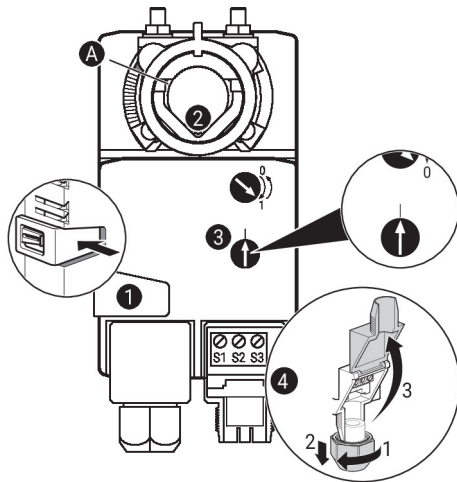

### Auxiliary switch settings



**Note:** Perform settings on the actuator only in deenergised state.

For the auxiliary switch position settings, carry out points ① to ④ successively.

- Manual override button**  
Holding button pressed down: Gear train disengages.  
Manual override is possible.
- Shaft clamp**  
Turn until edge line **A** displays the desired switching position of the actuator and release button ①.
- Auxiliary switch**  
Turn rotary knob until the arrow points to the vertical line.
- Terminal connection**  
Connect continuity tester to S1 + S2 or to S1 + S3.  
If the auxiliary switch should switch in the opposite direction, rotate the auxiliary switch by 180°.

## Dimensions

### Shaft length

|                                                                                   |                                                                                   |         |
|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|---------|
|  |  | Min. 37 |
|  |  | -       |

### Clamping range

|                                                                                   |                                                                                   |                                                                                   |
|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|
|  |  |  |
| 6...20                                                                            | $\geq 6$                                                                          | $\leq 20$                                                                         |

