

DATA SHEET - ORIGINAL INSTRUCTIONS

# TA565

## Accessories




### 1 Ordering data


| Part no.           | Description                                                                          | Product life cycle phase *) |
|--------------------|--------------------------------------------------------------------------------------|-----------------------------|
| 1TNE 968 901 R3105 | Terminal Block TA565-9, 9-pin<br>spring front, cable front, 6<br>pieces per unit     | Active                      |
| 1TNE 968 901 R3106 | Terminal Block TA565-11, 11-<br>pin, spring front, cable front, 6<br>pieces per unit | Active                      |

2 Dimensions

TA565-9

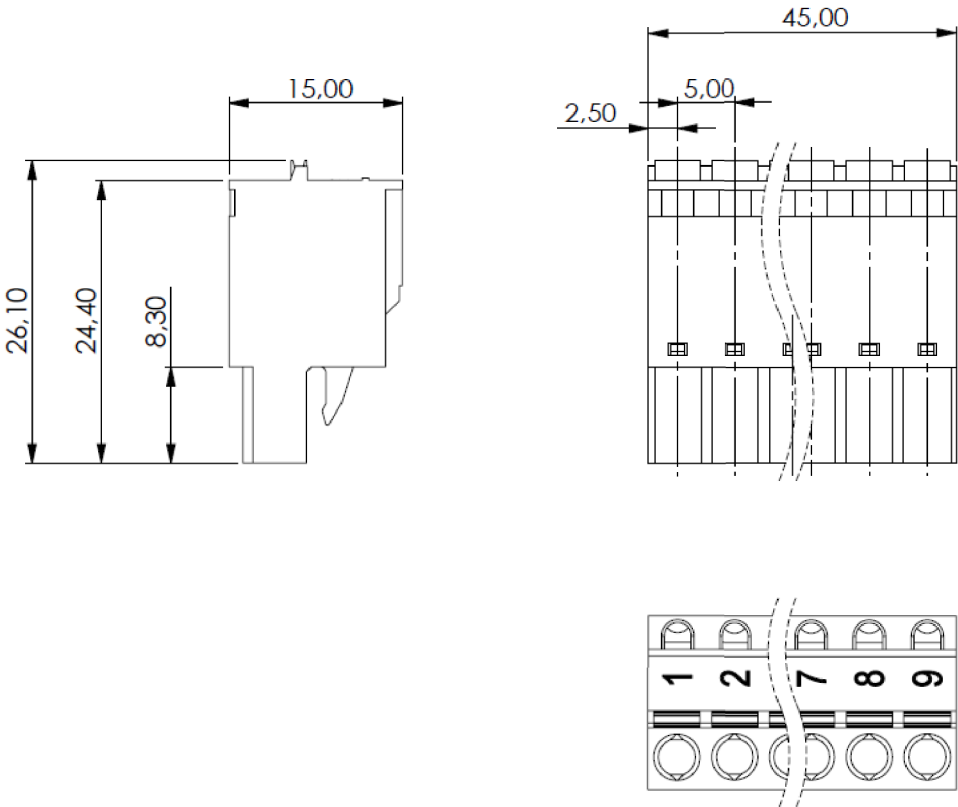

TA565-11

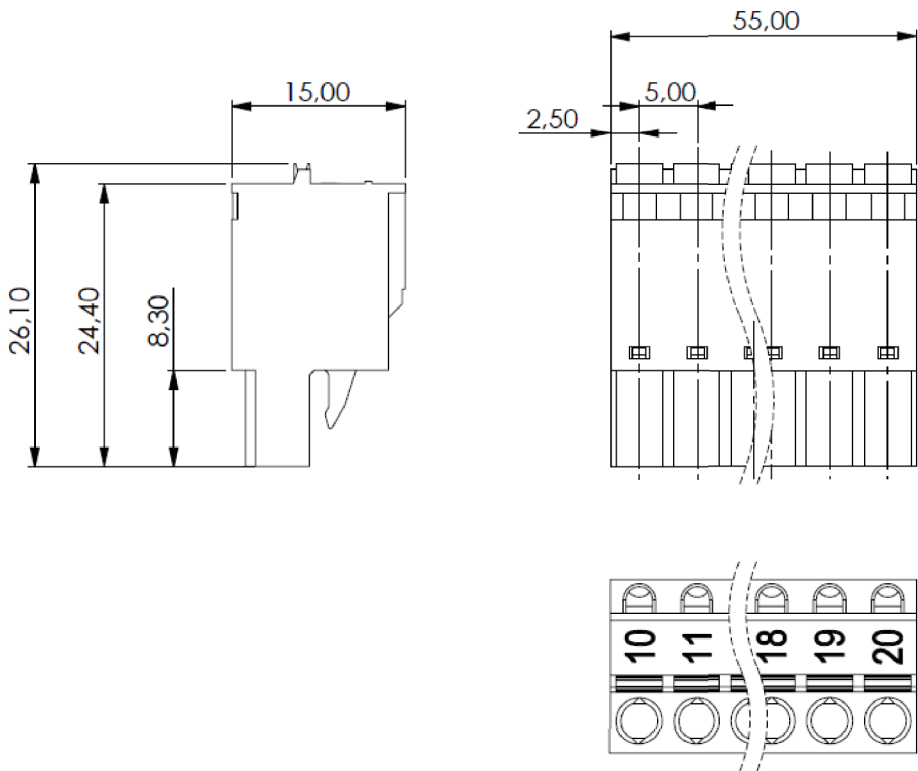

### 3 Technical data

Table 1: Spring terminals (TA565)

| Parameter                                                                      |          | Value                                                 |
|--------------------------------------------------------------------------------|----------|-------------------------------------------------------|
| Type                                                                           |          | Front terminal                                        |
| Conductor cross section                                                        |          |                                                       |
|                                                                                | Solid    | 0.5 mm <sup>2</sup> ... 2.5 mm <sup>2</sup>           |
|                                                                                | Flexible | 0.5 mm <sup>2</sup> ... 2.5 mm <sup>2</sup>           |
| Stripped conductor end                                                         |          | 10 mm                                                 |
| Degree of protection                                                           |          | IP 20                                                 |
| Conductor cross section flexible, with ferrule with/<br>without plastic sleeve |          | Min. 0.25 mm <sup>2</sup><br>Max. 1.5 mm <sup>2</sup> |