

# Product datasheet

Specifications



## yellow empty enclosure lid with light grey base - 3 cut-outs

Local distributor code:  
393523087 XALK03

EAN Code: 3389110127324

### Main

|                             |                                                                                                                                    |
|-----------------------------|------------------------------------------------------------------------------------------------------------------------------------|
| Range of product            | Harmony XALK                                                                                                                       |
| Product or component type   | Empty control station                                                                                                              |
| Device short name           | XALK                                                                                                                               |
| Product destination         | For XB5 Ø 22 mm control and signalling units                                                                                       |
| Control station application | Emergency stop function<br>Emergency switching off function                                                                        |
| Number of cut-out           | 3 cut-outs                                                                                                                         |
| Colour of base of enclosure | Light grey (RAL 7035)                                                                                                              |
| Colour of cover             | Yellow (RAL 1021)                                                                                                                  |
| Material                    | Polycarbonate                                                                                                                      |
| Cable entry                 | 2 knock-outs for cable entry, clamping capacity: 14 mm<br>2 knock-outs for Pg 13 cable gland and ISO M20, clamping capacity: 12 mm |
| IP degree of protection     | IP66 conforming to IEC 60529<br>IP67<br>IP69<br>IP69K                                                                              |

### Complementary

|                                    |                                       |
|------------------------------------|---------------------------------------|
| Assembly style                     | For customer assembly                 |
| Number of horizontal rows          | 1                                     |
| Number of vertical rows            | 3                                     |
| Product weight                     | 0.238 kg                              |
| Resistance to high pressure washer | 7000000 Pa at 55 °C, distance : 0.1 m |
| Mounting of block                  | Front mounting<br>Rear mounting       |
| Main group                         | 3 cut-outs                            |
| Group of product                   | Standard yellow                       |

### Environment

|                                       |                                  |
|---------------------------------------|----------------------------------|
| Protective treatment                  | TH                               |
| Ambient air temperature for storage   | -40...70 °C                      |
| Ambient air temperature for operation | -40...70 °C                      |
| Overvoltage category                  | Class II conforming to IEC 60536 |
| NEMA degree of protection             | NEMA 13<br>NEMA 4X               |

Disclaimer: This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications

|                         |                                                                                                                             |
|-------------------------|-----------------------------------------------------------------------------------------------------------------------------|
| IK degree of protection | IK03 conforming to IEC 62262                                                                                                |
| Standards               | JIS C8201-5-1<br>IEC 60947-5-1<br>CSA C22.2 No 14<br>UL 508<br>IEC 60947-1<br>IEC 60947-5-4<br>IEC 60947-5-5<br>JIS C8201-1 |

## Packing Units

|                              |          |
|------------------------------|----------|
| Unit Type of Package 1       | PCE      |
| Number of Units in Package 1 | 1        |
| Package 1 Height             | 7.5 cm   |
| Package 1 Width              | 7.0 cm   |
| Package 1 Length             | 13.7 cm  |
| Package 1 Weight             | 226.0 g  |
| Unit Type of Package 2       | S03      |
| Number of Units in Package 2 | 30       |
| Package 2 Height             | 30.0 cm  |
| Package 2 Width              | 30.0 cm  |
| Package 2 Length             | 40.0 cm  |
| Package 2 Weight             | 7.277 kg |

## Logistical informations

|                   |    |
|-------------------|----|
| Country of origin | CZ |
|-------------------|----|

## Contractual warranty

|                      |    |
|----------------------|----|
| Warranty (in months) | 18 |
|----------------------|----|



## Environmental Data

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing “Use Better, Use Longer, Use Again” campaign to extend product lifetimes and recyclability.

[Environmental Data explained >](#)

[How we assess product sustainability >](#)



### Environmental footprint

|                                                        |                                               |
|--------------------------------------------------------|-----------------------------------------------|
| Total lifecycle Carbon footprint                       | 2 kg CO2 eq.                                  |
| Carbon footprint of the manufacturing phase [A1 to A3] | 1 kg CO2 eq.                                  |
| Carbon footprint of the distribution phase [A4]        | 0 kg CO2 eq.                                  |
| Carbon footprint of the installation phase [A5]        | 0 kg CO2 eq.                                  |
| Carbon footprint of the use phase [B2, B3, B4, B6]     | 0 kg CO2 eq.                                  |
| Carbon footprint of the end-of-life phase [C1 to C4]   | 0 kg CO2 eq.                                  |
| Environmental Disclosure                               | <a href="#">Product Environmental Profile</a> |

## Use Better



### Materials and Substances

|                                        |                                                                             |
|----------------------------------------|-----------------------------------------------------------------------------|
| Packaging made with recycled cardboard | Yes                                                                         |
| Packaging without single use plastic   | Yes                                                                         |
| EU RoHS Directive                      | <a href="#">Compliant</a>                                                   |
| REACH Regulation                       | <a href="#">Free of Substances of Very High Concern above the threshold</a> |

## Use Longer



### Lifetime extension

|        |    |
|--------|----|
| Repair | No |
|--------|----|

## Use Again




### Repack and remanufacture

|                                 |                                         |
|---------------------------------|-----------------------------------------|
| Recyclability potential, in %   | 18                                      |
| End of life manual availability | <a href="#">End of Life Information</a> |
| Take-back                       | No                                      |

Dimensions Drawings

Dimensions

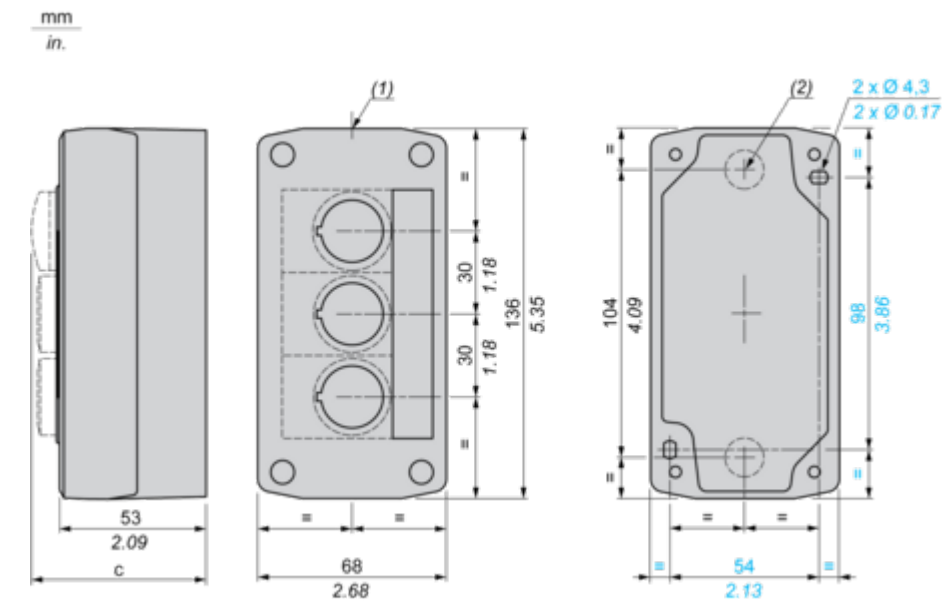


- (1) 2 knock-outs for Pg 13.5 cable gland, maximum capacity 12 mm/0.47 in.
- (2) Knock-out for cable entry, maximum capacity 14 mm/0.55 in.

| Control station fitted with: | c in mm | c in in. |
|------------------------------|---------|----------|
| Flush pushbutton             | 62      | 2.44     |
| Illuminated pushbutton       | 64      | 2.52     |
| Pilot light                  | 65.5    | 2.58     |
| Projecting pushbutton        | 66      | 2.60     |
| Selector switch              | 80      | 3.15     |
| Key switch                   | 105.5   | 4.15     |

Technical Illustration

Dimensions

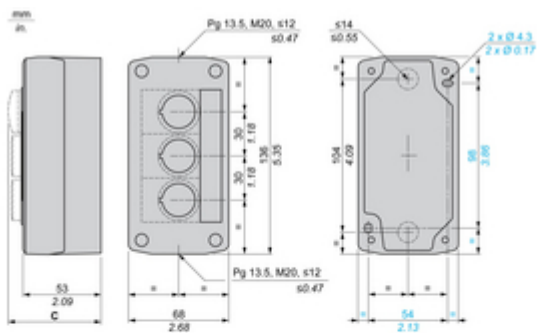

| C                                                                   | mm    | in.  |
|---------------------------------------------------------------------|-------|------|
| ZBSAA, ZBSAH0                                                       | 62    | 2.44 |
| ZBSAV                                                               | 64    | 2.52 |
| ZBSAW3                                                              | 65.5  | 2.58 |
| ZBSAL, ZBSAW1, ZBSAH, ZBSAH3                                        | 66    | 2.6  |
| ZBSAD, ZBSAK                                                        | 80    | 3.15 |
| ZBSAS6, ZBSAT, ZBSAC, ZBSAR, ZBSAW4, ZBSAW6, ZBSAS4, ZBSAS5, ZBSAS6 | 91.5  | 3.58 |
| ZBSAS9, ZBSAS1, ZBSAS7                                              | 115   | 4.53 |
| ZBSAG                                                               | 105.5 | 4.15 |