

# Product datasheet

Specifications



## Single contact block with body/fixing collar, plastic, screw clamp terminal, 1 NC

Local distributor code:  
237160357 ZB5AZ102

EAN Code: 3389110924411

### Main

|                               |                                                                                                                                                                                                          |
|-------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Range of product              | Harmony XB5                                                                                                                                                                                              |
| Product or component type     | Complete body/contact assembly                                                                                                                                                                           |
| Device short name             | ZB5                                                                                                                                                                                                      |
| Fixing collar material        | Plastic                                                                                                                                                                                                  |
| Sale per indivisible quantity | 1                                                                                                                                                                                                        |
| Head type                     | Standard                                                                                                                                                                                                 |
| Contacts type and composition | 1 NC                                                                                                                                                                                                     |
| Contact operation             | Slow-break                                                                                                                                                                                               |
| Contact block type            | Single                                                                                                                                                                                                   |
| Connections - terminals       | Screw clamp terminals, $\leq 2 \times 1.5 \text{ mm}^2$ with cable end conforming to IEC 60947-1<br>Screw clamp terminals, $\geq 1 \times 0.22 \text{ mm}^2$ without cable end conforming to IEC 60947-1 |

### Complementary

|                                             |                                                                                                                                                                                                           |
|---------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| CAD overall width                           | 30 mm                                                                                                                                                                                                     |
| CAD overall height                          | 42 mm                                                                                                                                                                                                     |
| CAD overall depth                           | 32 mm                                                                                                                                                                                                     |
| Terminals description ISO n°1               | (11-12)NC                                                                                                                                                                                                 |
| Product weight                              | 0.021 kg                                                                                                                                                                                                  |
| Device composition                          | Body<br>Fixing collar                                                                                                                                                                                     |
| Contacts usage                              | Standard contacts                                                                                                                                                                                         |
| Positive opening                            | With conforming to IEC 60947-5-1 appendix K                                                                                                                                                               |
| Operating travel                            | 1.5 mm (NC changing electrical state)<br>4.3 mm (total travel)                                                                                                                                            |
| Operating force                             | 2 N NC changing electrical state                                                                                                                                                                          |
| Mechanical durability                       | 10000000 cycles                                                                                                                                                                                           |
| Tightening torque                           | 0.8...1.2 N.m conforming to IEC 60947-1                                                                                                                                                                   |
| Shape of screw head                         | Cross compatible with Philips no 1 screwdriver<br>Cross compatible with pozidriv No 1 screwdriver<br>Slotted compatible with flat Ø 4 mm screwdriver<br>Slotted compatible with flat Ø 5.5 mm screwdriver |
| Contacts material                           | Silver alloy (Ag/Ni)                                                                                                                                                                                      |
| Short-circuit protection                    | 10 A cartridge fuse type gG conforming to IEC 60947-5-1                                                                                                                                                   |
| [Ith] conventional free air thermal current | 10 A conforming to IEC 60947-5-1                                                                                                                                                                          |

Disclaimer: This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications

|                                        |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
|----------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| [Ui] rated insulation voltage          | 600 V (pollution degree 3) conforming to IEC 60947-1                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| [Uimp] rated impulse withstand voltage | 6 kV conforming to IEC 60947-1                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| [Ie] rated operational current         | 3 A at 240 V, AC-15, A600 conforming to IEC 60947-5-1<br>6 A at 120 V, AC-15, A600 conforming to IEC 60947-5-1<br>0.1 A at 600 V, DC-13, Q600 conforming to IEC 60947-5-1<br>0.27 A at 250 V, DC-13, Q600 conforming to IEC 60947-5-1<br>0.55 A at 125 V, DC-13, Q600 conforming to IEC 60947-5-1<br>1.2 A at 600 V, AC-15, A600 conforming to IEC 60947-5-1                                                                                                                                                                                                                                                                               |
| Electrical durability                  | 1000000 cycles, AC-15, 2 A at 230 V, operating rate <3600 cyc/h, load factor: 0.5 conforming to IEC 60947-5-1 appendix C<br>1000000 cycles, AC-15, 3 A at 120 V, operating rate <3600 cyc/h, load factor: 0.5 conforming to IEC 60947-5-1 appendix C<br>1000000 cycles, AC-15, 4 A at 24 V, operating rate <3600 cyc/h, load factor: 0.5 conforming to IEC 60947-5-1 appendix C<br>1000000 cycles, DC-13, 0.2 A at 110 V, operating rate <3600 cyc/h, load factor: 0.5 conforming to IEC 60947-5-1 appendix C<br>1000000 cycles, DC-13, 0.5 A at 24 V, operating rate <3600 cyc/h, load factor: 0.5 conforming to IEC 60947-5-1 appendix C |
| Electrical reliability                 | $\Lambda < 10\exp(-6)$ at 5 V, 1 mA in clean environment conforming to IEC 60947-5-4<br>$\Lambda < 10\exp(-8)$ at 17 V, 5 mA in clean environment conforming to IEC 60947-5-4                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| Device presentation                    | Basic sub-assemblies                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |

## Environment

|                                       |                                                                                                                                                                                |
|---------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Protective treatment                  | TH                                                                                                                                                                             |
| Ambient air temperature for storage   | -40...70 °C                                                                                                                                                                    |
| Ambient air temperature for operation | -40...70 °C                                                                                                                                                                    |
| IP degree of protection               | IP20 conforming to IEC 60529                                                                                                                                                   |
| Standards                             | UL 508<br>IEC 60947-5-1<br>JIS C8201-5-1<br>IEC 60947-1<br>CSA C22.2 No 14<br>IEC 60947-5-4<br>JIS C8201-1                                                                     |
| Product certifications                | BV<br>UL<br>CSA<br>DNV<br>LROS (Lloyds register of shipping)                                                                                                                   |
| Vibration resistance                  | 5 gn (f= 2...500 Hz) conforming to IEC 60068-2-6                                                                                                                               |
| Shock resistance                      | 30 gn (duration = 18 ms) for half sine wave acceleration conforming to IEC 60068-2-27<br>50 gn (duration = 11 ms) for half sine wave acceleration conforming to IEC 60068-2-27 |

## Packing Units

|                              |           |
|------------------------------|-----------|
| Unit Type of Package 1       | PCE       |
| Number of Units in Package 1 | 1         |
| Package 1 Height             | 4.500 cm  |
| Package 1 Width              | 3.400 cm  |
| Package 1 Length             | 5.400 cm  |
| Package 1 Weight             | 20.000 g  |
| Unit Type of Package 2       | S03       |
| Number of Units in Package 2 | 300       |
| Package 2 Height             | 30.000 cm |

|                              |           |
|------------------------------|-----------|
| Package 2 Width              | 30.000 cm |
| Package 2 Length             | 40.000 cm |
| Package 2 Weight             | 6.512 kg  |
| Unit Type of Package 3       | P06       |
| Number of Units in Package 3 | 2400      |
| Package 3 Height             | 75.000 cm |
| Package 3 Width              | 60.000 cm |
| Package 3 Length             | 80.000 cm |
| Package 3 Weight             | 64.604 kg |

## Logistical informations

|                   |    |
|-------------------|----|
| Country of origin | FR |
|-------------------|----|

## Contractual warranty

|                      |    |
|----------------------|----|
| Warranty (in months) | 18 |
|----------------------|----|



## Environmental Data

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing “Use Better, Use Longer, Use Again” campaign to extend product lifetimes and recyclability.

[Environmental Data explained >](#)

[How we assess product sustainability >](#)



### Environmental footprint

|                                                        |                |
|--------------------------------------------------------|----------------|
| Total lifecycle Carbon footprint                       | 0.2 kg CO2 eq. |
| Carbon footprint of the manufacturing phase [A1 to A3] | 0.2 kg CO2 eq. |
| Carbon footprint of the distribution phase [A4]        | 0 kg CO2 eq.   |
| Carbon footprint of the installation phase [A5]        | 0 kg CO2 eq.   |
| Carbon footprint of the use phase [B2, B3, B4, B6]     | 0 kg CO2 eq.   |
| Carbon footprint of the end-of-life phase [C1 to C4]   | 0 kg CO2 eq.   |

## Use Better



### Materials and Substances

|                                                |                                                                             |
|------------------------------------------------|-----------------------------------------------------------------------------|
| Average percentage of recycled plastic content | 24 %                                                                        |
| Average percentage of recycled metal content   | 12 %                                                                        |
| Packaging made with recycled cardboard         | Yes                                                                         |
| Packaging without single use plastic           | Yes                                                                         |
| EU RoHS Directive                              | <a href="#">Compliant</a>                                                   |
| REACH Regulation                               | <a href="#">Free of Substances of Very High Concern above the threshold</a> |

## Use Longer



### Lifetime extension

|        |    |
|--------|----|
| Repair | No |
|--------|----|

## Use Again




### Repack and remanufacture

|                                 |                                                                                                                                                                                                                 |
|---------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Recyclability potential, in %   | 0                                                                                                                                                                                                               |
| End of life manual availability | <a href="#">End of Life Information</a>                                                                                                                                                                         |
| Take-back                       | No                                                                                                                                                                                                              |
| WEEE Label                      |  The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins |

Dimensions Drawings

Dimensions

---



Mounting and Clearance

Panel Cut-out for Pushbuttons, Switches and Pilot Lights (Finished Holes, Ready for Installation)

Connection by Screw Clamp Terminals or Plug-in Connectors or on Printed Circuit Board



- (1) Diameter on finished panel or support
- (2) For selector switches and Emergency stop buttons, use of an anti-rotation plate type ZB5AZ902 is recommended.
- (3) Ø22.5 mm recommended ( $\text{Ø}22.3 \begin{smallmatrix} +0.4 \\ 0 \end{smallmatrix}$ ) / Ø0.89 in. recommended ( $\text{Ø}0.88 \text{ in. } \begin{smallmatrix} +0.016 \\ 0 \end{smallmatrix}$ )

| Connections                                   | a in mm | a in in. | b in mm | b in in. |
|-----------------------------------------------|---------|----------|---------|----------|
| By screw clamp terminals or plug-in connector | 40      | 1.57     | 30      | 1.18     |
| By Faston connectors                          | 45      | 1.77     | 32      | 1.26     |
| On printed circuit board                      | 30      | 1.18     | 30      | 1.18     |



Detail of Lug Recess



- (1) Diameter on finished panel or support
- (2) For selector switches and Emergency stop buttons, use of an anti-rotation plate type ZB5AZ902 is recommended.
- (3) Ø22.5 mm recommended ( $\text{Ø}22.3 \begin{smallmatrix} +0.4 \\ 0 \end{smallmatrix}$ ) / Ø0.89 in. recommended ( $\text{Ø}0.88 \text{ in. } \begin{smallmatrix} +0.016 \\ 0 \end{smallmatrix}$ )

## Technical Illustration

## Dimensions

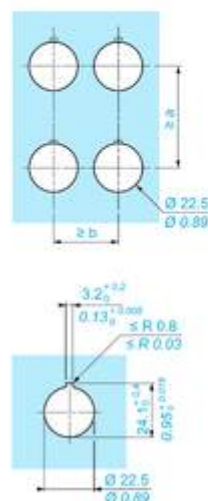

|           |          | a (mm) | a (n.) | b (mm) | b (n.) |
|-----------|----------|--------|--------|--------|--------|
|           |          | 40     | 1.57   | 30     | 1.18   |
| ZBE.....  | ZBV....  |        |        |        |        |
|           |          | 45     | 1.77   | 32     | 1.26   |
| ZBE.....3 | ZBV....3 |        |        |        |        |
|           |          | 40     | 1.57   | 30     | 1.18   |
| ZBE.....4 | ZBV....4 |        |        |        |        |
|           |          | 50     | 1.97   | 30     | 1.18   |
| ZBE.....5 | ZBV....5 |        |        |        |        |
|           |          | 40     | 1.57   | 30     | 1.18   |
| ZBE.....9 | ZBV....9 |        |        |        |        |
|           |          | 40     | 1.57   | 30     | 1.18   |
| ZBR7.     | ZBRV1    |        |        |        |        |

Offer Marketing Illustration

Product benefits / Features

---

### Features

Harmony XB5



Quick and easy assembly and disassembly



Excellent mechanical connection with operator head



Various types of connection: screw clamp, connector, Faston connector, spring terminal, or printed circuit board



Robustness to withstand harsh environments



Large set of accessories to customize your panels



Offer Marketing Illustration

Product benefits / Features



Image of product / Alternate images

Alternative

---



