



SIRIUS safety relay Basic unit Standard series Relay enabling circuits 3 NO contacts plus Relay signaling circuit 1 NC contact $U_s = 110 - 240 \text{ V AC/DC } 50/60 \text{ Hz}$ screw terminal

product brand name	SIRIUS
product category	Safety relays
product designation	safety relays
design of the product	Relay enabling circuits
product type designation	3SK1
product line	Standard basic unit
Product Function	
product function parameterizable	Sensor floating / monitored start / automatic start
product function	• automatic start • light barrier monitoring • protective door monitoring • magnetically operated switch monitoring NC-NO • magnetically operated switch monitoring NC-NC • laser scanner monitoring • light array monitoring • EMERGENCY OFF function • monitored start-up • pressure-sensitive mat monitoring
product feature cross-circuit-proof	Yes
suitability for interaction press control	No
suitability for operation device connector 3ZY12	No
suitability for use	• monitoring of floating sensors • monitoring of non-floating sensors • position switch monitoring • EMERGENCY-OFF circuit monitoring • opto-electronic protection device monitoring • magnetically operated switch monitoring • safety-related circuits
General technical data	
certificate of suitability UL approval	Yes
product feature protective coating on printed-circuit board	No
power loss [W] maximum	2.5 W
insulation voltage rated value	300 V
degree of pollution	3
overvoltage category	3
surge voltage resistance rated value	4 000 V
protection class IP of the enclosure	IP20

shock resistance	10 g / 11 ms
vibration resistance according to IEC 60068-2-6	5 ... 500 Hz: 0.75 mm
operating frequency maximum	360 1/h
reference code according to IEC 81346-2	F
Substance Prohibitance (day/month/year)	11/05/2012
SVHC substance name	Lead CAS-No. 7439-92-1 Lead monoxide (lead oxide) CAS-No. 1317-36-8 2-methyl-1-(4-methylthiophenyl)-2-morpholinopropan-1-one CAS-No. 71868-10-5 Melamine CAS-No. 108-78-1 6,6'-di-tert-butyl-2,2'-methylenedi-p-cresol CAS-No. 119-47-1 4,4'-isopropylidenediphenol (Bisphenol A, BPA) CAS-No. 80-05-7
Net Weight	0.258 kg
Ambient conditions	
installation altitude at height above sea level maximum	4 000 m
• note	Derating, see Product Notification 109792701
ambient temperature	
• during operation	-25 ... +60 °C
• during storage	-40 ... +80 °C
relative humidity during operation	10 ... 95 %
air pressure according to SN 31205	900 ... 1 060 hPa
Electromagnetic compatibility	
installation environment regarding EMC	This product is suitable for Class A environments only. In household environments, this device can cause unwanted radio interference. The user is required to implement appropriate measures in this case.
EMC emitted interference	IEC 60947-5-1, Class A
Safety related data	
product function suitable for safety function	Yes
safe state	Safety outputs switched off
test wear-related service life necessary	Yes
function test interval maximum	1 a
stop category according to IEC 60204-1	0
IEC 62061	
SIL Claim Limit (subsystem) according to EN 62061	3
Safety Integrity Level (SIL)	
• according to IEC 62061	SIL 3
• at single-channel evaluation according to IEC 62061	1
• at 2-channel evaluation according to IEC 62061	3
PFHD with high demand rate according to IEC 62061	0,0000000015
ISO 13849	
category according to EN ISO 13849-1	4
performance level (PL)	
• according to ISO 13849-1	PL e
• at single-channel evaluation according to ISO 13849-1	c
• at 2-channel evaluation according to ISO 13849-1	e
category	
• according to ISO 13849-1	4
• at 2-channel evaluation according to ISO 13849-1	4
overdimensioning according to ISO 13849-2 necessary	No
IEC 61508	
Safety Integrity Level (SIL)	
• according to IEC 61508	3
• at single-channel evaluation according to IEC 61508	1
• at 2-channel evaluation according to IEC 61508	3
safety device type according to IEC 61508-2	Type A
PFHD with high demand rate according to IEC 61508	0.0000000015
PFDAvg with low demand rate according to IEC 61508	0.000001
Safe failure fraction (SFF)	99 %
hardware fault tolerance	
• according to IEC 61508	1
• at single-channel evaluation according to IEC 61508	0

• at 2-channel evaluation according to IEC 61508	1
T1 value	
• of service life according to IEC 61508	20 a
• for proof test interval or service life according to IEC 61508	20 a
Electrical Safety	
touch protection against electrical shock	finger-safe
Short-circuit protection	
design of the fuse link	
• for short-circuit protection of the NO contacts of the relay outputs required	gL/gG: 6A or circuit breaker type A: 3A or circuit breaker type B: 2A or circuit breaker type C: 1A
• for short circuit protection of the NC contacts of the relay outputs required	Diazed or Neozed fuses, operating class gL/gG: 6 A or MCB type A: 2 A or MCB type B: 2 A or MCB type C: 1 A
Inputs	
design of input	
• cascading input/functional switching	No
• feedback input	Yes
• start input	Yes
pulse duration of the sensor input minimum	150 ms
number of sensor inputs 1-channel or 2-channel	1
Outputs	
number of outputs as contact-affected switching element	
• as NC contact — for signaling function instantaneous contact	1
• as NO contact — safety-related instantaneous contact	3
— safety-related delayed switching	0
mechanical service life (operating cycles) typical	10 000 000
thermal current of the switching element with contacts maximum	5 A
switching capacity current of the NO contacts of the relay outputs at DC-13	
• at 24 V	5 A
• at 115 V	0.2 A
• at 230 V	0.1 A
switching capacity current of the NO contacts of the relay outputs at AC-15	
• at 115 V	5 A
• at 230 V	5 A
switching capacity current of the NC contacts of the relay outputs at DC-13	
• at 24 V	1 A
• at 115 V	0.2 A
• at 230 V	0.1 A
switching capacity current of the NC contacts of the relay outputs at AC-15	
• at 24 V	2 A
• at 115 V	1.5 A
• at 230 V	1.5 A
total current maximum	12 A
operational current at 17 V minimum	5 mA
Times	
make time with automatic start	
• typical	110 ms
• at DC maximum	130 ms
• at AC maximum	130 ms
make time with automatic start after power failure	
• typical	110 ms
• maximum	130 ms
make time with monitored start	
• typical	15 ms

• maximum	15 ms			
backslide delay time after opening of the safety circuits typical	10 ms			
backslide delay time in the event of power failure				
• typical	200 ms			
• maximum	300 ms			
recovery time after opening of the safety circuits typical	10 ms			
recovery time after power failure typical	0.32 s			
pulse duration				
• of the ON pushbutton input minimum	0.015 s			
Control circuit/ Control				
type of voltage of the control supply voltage	AC/DC			
control supply voltage at AC				
• at 50 Hz rated value	110 ... 240 V			
• at 60 Hz rated value	110 ... 240 V			
control supply voltage frequency				
• 1 rated value	50 Hz			
• 2 rated value	60 Hz			
control supply voltage at DC rated value	110 ... 240 V			
operating range factor control supply voltage rated value of magnet coil at DC				
• initial value	0.85			
• full-scale value	1.1			
operating range factor control supply voltage rated value of magnet coil at AC				
• at 50 Hz	0.85 ... 1.1			
• at 60 Hz	0.85 ... 1.1			
Installation/ mounting/ dimensions				
mounting position	any			
fastening method	screw and snap-on mounting			
height	100 mm			
width	22.5 mm			
depth	121.5 mm			
required spacing				
• for grounded parts at the side	5 mm			
Connections/ Terminals				
type of electrical connection	screw terminal			
wire length				
• for total of all sensor circuits with Cu 1.5 mm² and 150 nF/km maximum	2 000 m			
type of connectable conductor cross-sections				
• solid	1x (0.5 ... 2.5 mm²), 2x (1.0 ... 1.5 mm²)			
• finely stranded with core end processing	1x (0.5 ... 2.5 mm²), 2x (0.5 ... 1.0 mm²)			
• for AWG cables solid	1x (20 ... 14), 2x (18 ... 16)			
• for AWG cables stranded	1x (20 ... 16), 2x (20 ... 16)			
type of electrical connection plug-in socket	No			
Approvals Certificates				
Environment	General Product Approval			
Environmental Con- firmations     				
General Product Ap- proval	EMV	Functional Saftey	Test Certificates	Maritime application



[Type Examination Certificate](#)

[Type Test Certificates/Test Report](#)



Maritime application	other	Railway
----------------------	-------	---------



[Confirmation](#)



[Confirmation](#)

Further information

Information on the packaging

<https://support.industry.siemens.com/cs/ww/en/view/109813875>

Information for data generation and storage

<https://support.industry.siemens.com/cs/ww/en/view/109995012>

Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/ic10>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3SK1111-1AW20>

Cax online generator


<https://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3SK1111-1AW20>





Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3SK1111-1AW20>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

https://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3SK1111-1AW20&lang=en

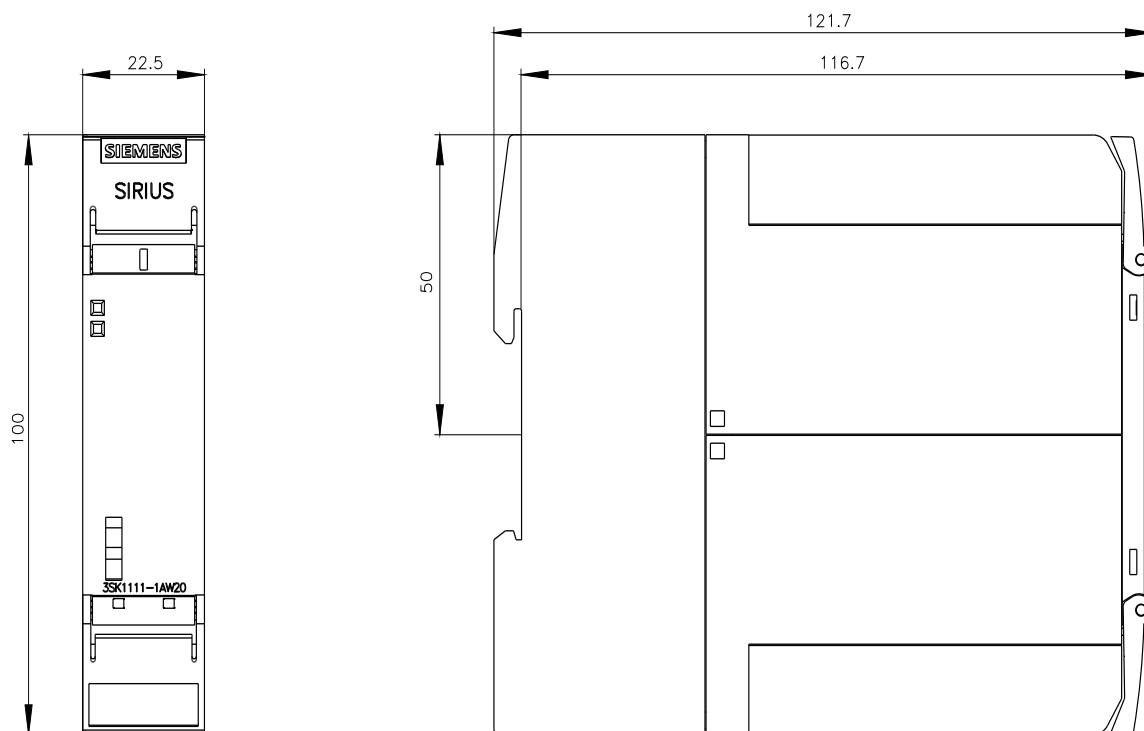

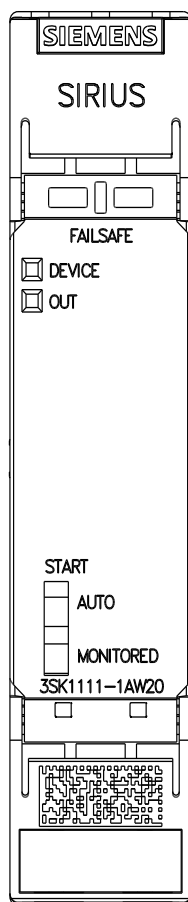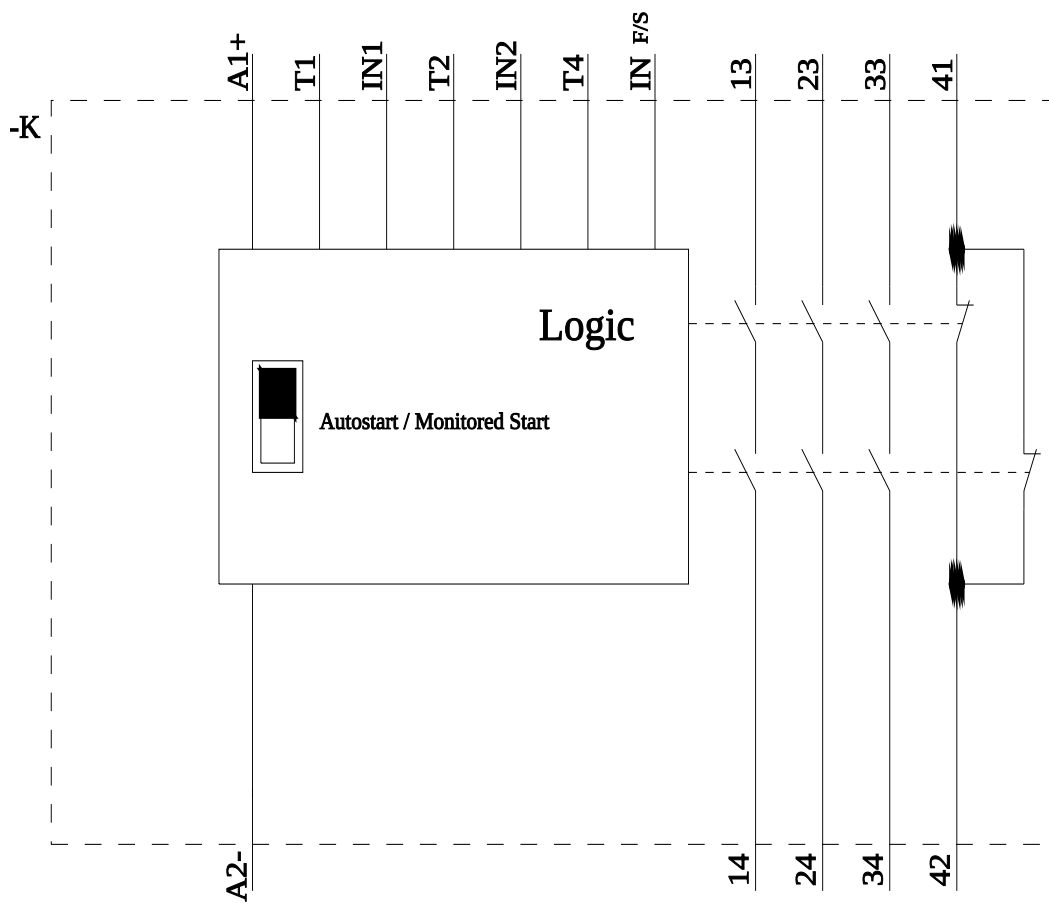

last modified:

7/26/2026