



SIRIUS safety relay Output expansion 4RO with relay enabling circuits 4 NO contacts plus Relay signaling circuit 1 NC contact $U_s = 110-240\text{ V AC/DC}$ screw terminal

product brand name	SIRIUS
product category	Safety relays
product designation	Output expansion
design of the product	Relay enabling circuits
product type designation	3SK1
Product Function	
suitability for use	
• safety-related circuits	Yes
General technical data	
certificate of suitability UL approval	Yes
power loss [W] maximum	2 W
insulation voltage rated value	300 V
degree of pollution	3
overvoltage category	3
surge voltage resistance rated value	4 000 V
protection class IP of the enclosure	IP20
shock resistance	10 g / 11 ms
vibration resistance according to IEC 60068-2-6	5 ... 500 Hz: 0.75 mm
operating frequency maximum	360 1/h
reference code according to IEC 81346-2	F
Substance Prohibitance (day/month/year)	11/05/2012
SVHC substance name	Lead CAS-No. 7439-92-1 Lead monoxide (lead oxide) CAS-No. 1317-36-8 2-methyl-1-(4-methylthiophenyl)-2-morpholinopropan-1-one CAS-No. 71868-10-5 Melamine CAS-No. 108-78-1 6,6'-di-tert-butyl-2,2'-methylenedi-p-cresol CAS-No. 119-47-1 4,4'-isopropylidenediphenol (Bisphenol A, BPA) CAS-No. 80-05-7
Net Weight	0.247 kg
Ambient conditions	
installation altitude at height above sea level maximum	4 000 m
• note	Derating, see Product Notification 109792701
ambient temperature	
• during operation	-25 ... +60 °C
• during storage	-40 ... +80 °C
relative humidity during operation	10 ... 95 %
air pressure according to SN 31205	900 ... 1 060 hPa
Electromagnetic compatibility	
installation environment regarding EMC	This product is suitable for Class A environments only. In household environments, this device can cause unwanted radio interference. The user is required to implement appropriate measures in this case.

EMC emitted interference	IEC 60947-5-1, Class A
Safety related data	
product function suitable for safety function	Yes
safe state	Safety outputs switched off
test wear-related service life necessary	Yes
function test interval maximum	1 a
stop category according to IEC 60204-1	0
proportion of dangerous failures with low demand rate according to SN 31920	15 %
failure rate [FIT] with low demand rate according to SN 31920	130 FIT
IEC 62061	
SIL Claim Limit (subsystem) according to EN 62061	3
Safety Integrity Level (SIL)	
• according to IEC 62061	SIL 3
PFHD with high demand rate according to IEC 62061	
•	1.7E-9 1/h
•	0.0000000017 1/h
ISO 13849	
category according to EN ISO 13849-1	4
performance level (PL)	
• according to ISO 13849-1	PL e
category	
• according to ISO 13849-1	4
device type according to ISO 13849-1	1
overdimensioning according to ISO 13849-2 necessary	No
IEC 61508	
Safety Integrity Level (SIL)	
• according to IEC 61508	3
safety device type according to IEC 61508-2	Type A
PFHD with high demand rate according to IEC 61508	1.7E-9 1/h
PFHD with high demand rate according to IEC 61508	0.0000000017 1/h
PFDavg with low demand rate according to IEC 61508	
•	1E-6
•	0.000001
Safe failure fraction (SFF)	99 %
hardware fault tolerance	
• according to IEC 61508	1
T1 value	
• of service life according to IEC 61508	20 a
• for proof test interval or service life according to IEC 61508	20 a
Electrical Safety	
touch protection against electrical shock	finger-safe
Short-circuit protection	
design of the fuse link for short-circuit protection of the NO contacts of the relay outputs required	gL/gG: 6A or circuit breaker type A: 3A or circuit breaker type B: 2A or circuit breaker type C: 1A
Inputs	
design of input	
• feedback input	No
Outputs	
number of outputs as contact-affected switching element	
• as NC contact	
— for signaling function delayed switching	0
— safety-related instantaneous contact	0
— safety-related delayed switching	0
• as NO contact	
— for signaling function instantaneous contact	0
— for signaling function delayed switching	0
— safety-related instantaneous contact	4

— safety-related delayed switching	0
mechanical service life (operating cycles) typical	10 000 000
thermal current of the switching element with contacts maximum	5 A
number of outputs as contact-less semiconductor switching element	
• for signaling function	
— delayed switching	0
switching capacity current of the NO contacts of the relay outputs at DC-13	
• at 24 V	5 A
• at 115 V	0.2 A
• at 230 V	0.1 A
switching capacity current of the NO contacts of the relay outputs at AC-15	
• at 24 V	5 A
• at 115 V	5 A
• at 230 V	5 A
total current maximum	12 A
operational current at 17 V minimum	5 mA
Times	
make time with automatic start	
• typical	35 ms
• at AC maximum	35 ms
make time with automatic start after power failure	
• typical	35 ms
• maximum	35 ms
backslide delay time in the event of power failure	
• typical	200 ms
• maximum	300 ms
recovery time after power failure typical	0.32 s
Control circuit/ Control	
type of voltage of the control supply voltage	AC/DC
control supply voltage at AC	
• at 50 Hz rated value	110 ... 240 V
• at 60 Hz rated value	110 ... 240 V
control supply voltage frequency	
• 1 rated value	50 Hz
• 2 rated value	60 Hz
control supply voltage at DC rated value	110 ... 240 V
operating range factor control supply voltage rated value of magnet coil at DC	
• initial value	0.85
• full-scale value	1.1
operating range factor control supply voltage rated value of magnet coil at AC	
• at 50 Hz	0.85 ... 1.1
• at 60 Hz	0.85 ... 1.1
ON-delay time	
• at AC maximum	35 ms
• at DC maximum	35 ms
OFF-delay time maximum	300 ms
Installation/ mounting/ dimensions	
mounting position	any
fastening method	screw and snap-on mounting
height	100 mm
width	22.5 mm
depth	121.5 mm
required spacing	
• with side-by-side mounting at the side	0 mm

- for grounded parts at the side

5 mm

Connections/ Terminals

type of electrical connection	screw terminal
type of connectable conductor cross-sections	
• solid	1x (0.5 ... 2.5 mm ²), 2x (1.0 ... 1.5 mm ²)
• finely stranded with core end processing	1x (0.5 ... 2.5 mm ²), 2x (0.5 ... 1.0 mm ²)
• for AWG cables solid	1x (20 ... 14), 2x (18 ... 16)
type of electrical connection plug-in socket	No

Approvals Certificates

Environment	General Product Approval
-------------	--------------------------

[Environmental Con-
firmations](#)



General Product Ap- proval	EMV	Functional Safety	Test Certificates	Maritime application
-------------------------------	-----	-------------------	-------------------	----------------------



[Type Examination Cer-
tificate](#)

[Type Test Certi-
ficates/Test Report](#)



Maritime application	other	Railway
----------------------	-------	---------



[Confirmation](#)



[Confirmation](#)

Further information

Information on the packaging

<https://support.industry.siemens.com/cs/ww/en/view/109813875>

Information for data generation and storage

<https://support.industry.siemens.com/cs/ww/en/view/109995012>

Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/ic10>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3SK1211-1BW20>

Cax online generator




<https://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3SK1211-1BW20>


Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3SK1211-1BW20>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

https://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3SK1211-1BW20&lang=en

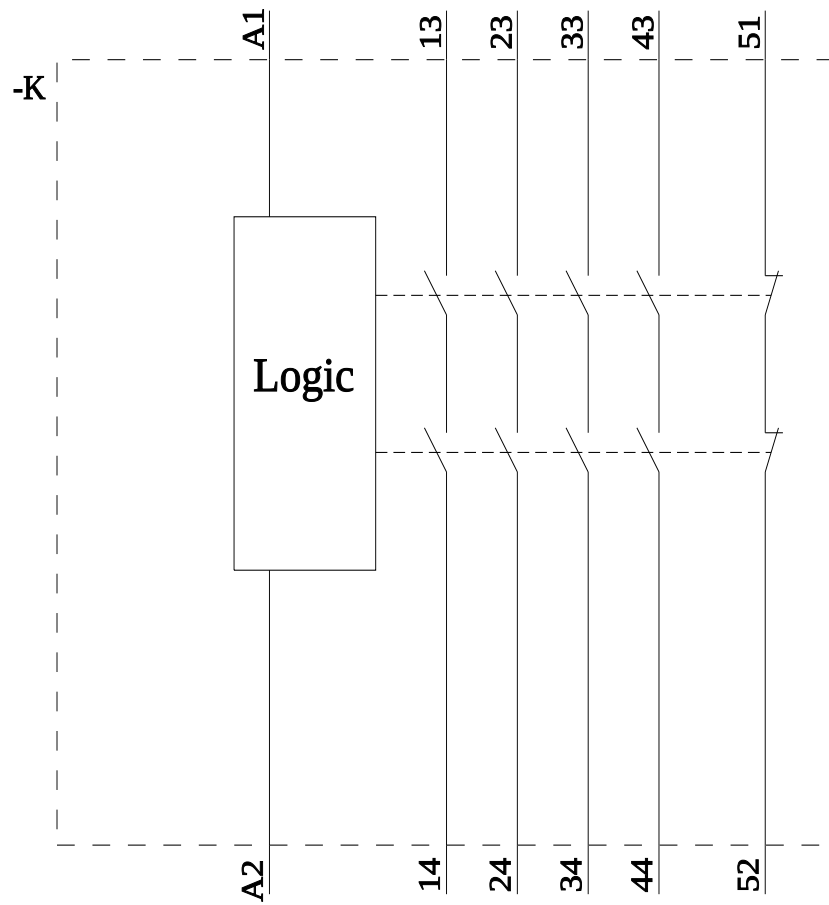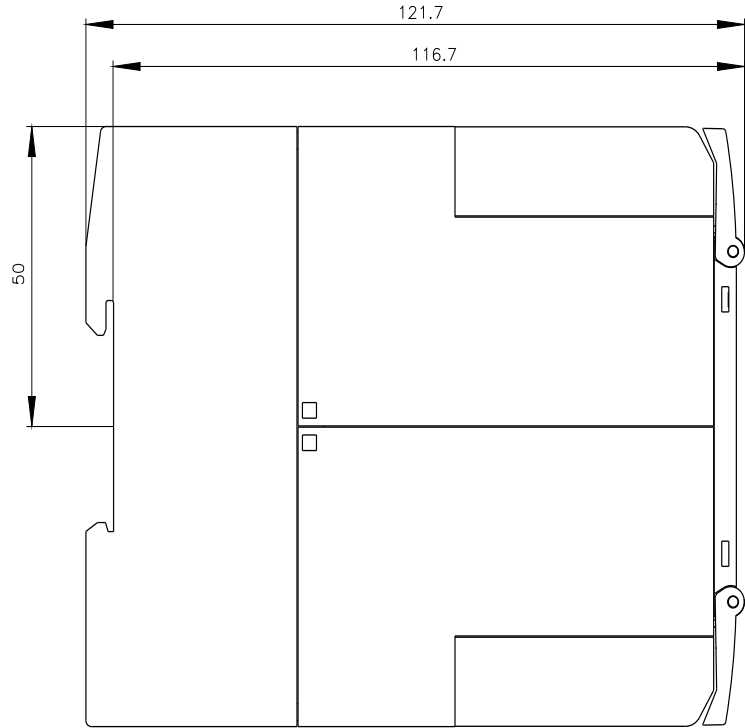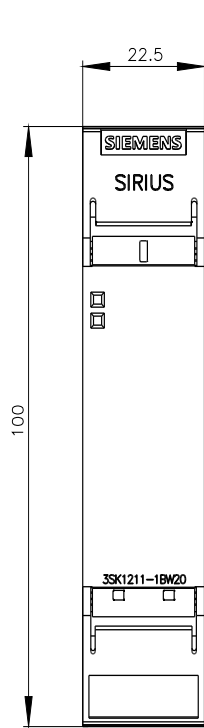

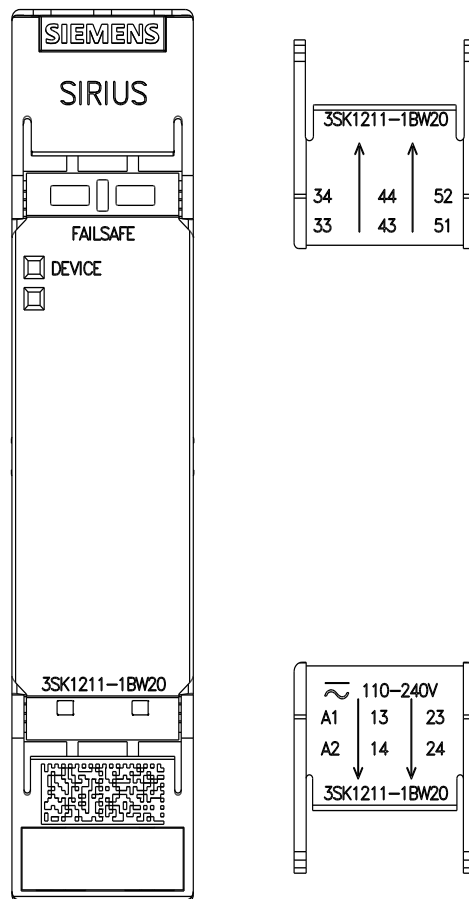

last modified:

7/26/2026 