

Product datasheet

Specifications



TeSys D contactor - 3P - <= 440 V - 32 A AC-3 - 100...250 V AC/DC coil

Local distributor code:

407811711

LC1D32KUE

EAN Code: 3606480987779

Main

Range of product	TeSys Deca Advanced
Product or component type	Contactor
Device short name	LC1D
Contactor application	Resistive load Motor control
Utilisation category	AC-3 AC-1 AC-3e
Poles description	3P
[Ue] rated operational voltage	Power circuit: <= 690 V AC 25...400 Hz
[Ie] rated operational current	32 A (at <60 °C) at <= 440 V AC-3 for power circuit 50 A (at <60 °C) at <= 440 V AC-1 for power circuit 32 A (at <60 °C) at <= 440 V AC-3e for power circuit
[Uc] control circuit voltage	100...250 V AC 50/60 Hz 100...250 V DC

Complementary

Motor power kW	7.5 kW at 220...230 V AC 50 Hz (AC-3) 15 kW at 380...400 V AC 50 Hz (AC-3) 15 kW at 415 V AC 50 Hz (AC-3) 15 kW at 440 V AC 50 Hz (AC-3) 18.5 kW at 500 V AC 50 Hz (AC-3) 18.5 kW at 660...690 V AC 50 Hz (AC-3) 7.5 kW at 220...230 V AC 50 Hz (AC-3e) 15 kW at 380...400 V AC 50 Hz (AC-3e) 15 kW at 415 V AC 50 Hz (AC-3e) 15 kW at 440 V AC 50 Hz (AC-3e) 18.5 kW at 500 V AC 50 Hz (AC-3e) 18.5 kW at 660...690 V AC 50 Hz (AC-3e)
Motor power hp	2 hp at 115 V AC 50/60 Hz for 1 phase motors 5 hp at 230/240 V AC 50/60 Hz for 1 phase motors 10 hp at 200/208 V AC 50/60 Hz for 3 phases motors 10 hp at 230/240 V AC 50/60 Hz for 3 phases motors 20 hp at 460/480 V AC 50/60 Hz for 3 phases motors 25 hp at 575/600 V AC 50/60 Hz for 3 phases motors
Compatibility code	LC1D
Pole contact composition	3 NO
Protective cover	With
[Ith] conventional free air thermal current	10 A (at 60 °C) for signalling circuit 50 A (at 60 °C) for power circuit
Irms rated making capacity	140 A AC for signalling circuit conforming to IEC 60947-5-1 250 A DC for signalling circuit conforming to IEC 60947-5-1 550 A at 440 V for power circuit conforming to IEC 60947
Rated breaking capacity	550 A at 440 V for power circuit conforming to IEC 60947

Disclaimer: This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications

[Icw] rated short-time withstand current	100 A - 1 s for signalling circuit 120 A - 500 ms for signalling circuit 140 A - 100 ms for signalling circuit 60 A 40 °C - 10 min for power circuit 138 A 40 °C - 1 min for power circuit 260 A 40 °C - 10 s for power circuit 430 A 40 °C - 1 s for power circuit
Associated fuse rating	10 A gG for signalling circuit conforming to IEC 60947-5-1 63 A gG at <= 690 V coordination type 1 for power circuit 63 A gG at <= 690 V coordination type 2 for power circuit
Average impedance	2 mOhm - lth 50 A 50 Hz for power circuit
Power dissipation per pole	2 W AC-3 5 W AC-1 2 W AC-3e
[Ui] rated insulation voltage	Power circuit: 690 V conforming to IEC 60947-4-1 Signalling circuit: 690 V conforming to IEC 60947-1
Overvoltage category	III
Pollution degree	3
[Uimp] rated impulse withstand voltage	6 kV conforming to IEC 60947
Safety reliability level	B10d = 1369863 cycles contactor with nominal load conforming to EN/ISO 13849-1 B10d = 20000000 cycles contactor with mechanical load conforming to EN/ISO 13849-1
Mechanical durability	15 Mcycles
Electrical durability	2.1 Mcycles 29 A AC-3 at Ue <= 440 V 0.9 Mcycles 50 A AC-1 at Ue <= 440 V 2.1 Mcycles 29 A AC-3e at Ue <= 440 V
Control circuit type	AC/DC at 50/60 Hz AC/DC electronic
Coil technology	Built-in bidirectional peak limiting
Control circuit voltage limits	<= 0.1 Uc (-40...70 °C):drop-out AC/DC 0.85...1.1 Uc (-40...60 °C):operational AC/DC 1...1.1 Uc (60...70 °C):operational AC/DC
Inrush power in VA	25 VA 50/60 Hz (at 20 °C)
Inrush power in W	18 W (at 20 °C)
Hold-in power consumption in VA	1.6 VA 50/60 Hz (at 20 °C)
Hold-in power consumption in W	1.1 W at 20 °C
Heat dissipation	1.1 W at 50/60 Hz
Operating time	45...55 ms closing 20...90 ms opening
Maximum operating rate	3600 cyc/h at 60 °C
Connections - terminals	Control circuit: screw clamp terminals 1 1...4 mm² - cable stiffness: flexible without cable end Control circuit: screw clamp terminals 2 1...4 mm² - cable stiffness: flexible without cable end Control circuit: screw clamp terminals 1 1...4 mm² - cable stiffness: flexible with cable end Control circuit: screw clamp terminals 2 1...2.5 mm² - cable stiffness: flexible with cable end Control circuit: screw clamp terminals 1 1...4 mm² - cable stiffness: solid Control circuit: screw clamp terminals 2 1...4 mm² - cable stiffness: solid Power circuit: screw clamp terminals 1 2.5...10 mm² - cable stiffness: flexible without cable end Power circuit: screw clamp terminals 2 2.5...10 mm² - cable stiffness: flexible without cable end Power circuit: screw clamp terminals 1 1...10 mm² - cable stiffness: flexible with cable end Power circuit: screw clamp terminals 2 1.5...6 mm² - cable stiffness: flexible with cable end Power circuit: screw clamp terminals 1 1.5...10 mm² - cable stiffness: solid Power circuit: screw clamp terminals 2 2.5...10 mm² - cable stiffness: solid

Tightening torque	Control circuit: 1.7 N.m - on screw clamp terminals - with screwdriver flat Ø 6 mm Control circuit: 1.7 N.m - on screw clamp terminals - with screwdriver Philips No 2 Power circuit: 2.5 N.m - on screw clamp terminals - with screwdriver flat Ø 6 mm Power circuit: 2.5 N.m - on screw clamp terminals - with screwdriver Philips No 2 Power circuit: 2.5 N.m - on screw clamp terminals - with screwdriver pozidriv No 2 M4 Control circuit: 1.7 N.m - on screw clamp terminals - with screwdriver pozidriv No 2 M3.5
Auxiliary contact composition	1 NO + 1 NC
Auxiliary contacts type	type mechanically linked 1 NO + 1 NC conforming to IEC 60947-5-1 type mirror contact 1 NC conforming to IEC 60947-4-1
Signalling circuit frequency	25...400 Hz
Minimum switching voltage	17 V for signalling circuit
Minimum switching current	5 mA for signalling circuit
Insulation resistance	> 10 MOhm for signalling circuit
Non-overlap time	1.5 ms on de-energisation between NC and NO contact 1.5 ms on energisation between NC and NO contact
Mounting support	Plate Rail

Environment

Standards	EN/IEC 60947-4-1 EN/IEC 60947-5-1 UL 60947-4-1 CSA C22.2 No 60947-4-1 IEC 60335-1
Product certifications	CCC CSA EAC UL KC DNV-GL LROS (Lloyds register of shipping) UKCA
IP degree of protection	IP20 front face conforming to IEC 60529
Climatic withstand	conforming to IACS E10 exposure to damp heat conforming to IEC 60947-1 Annex Q category D exposure to damp heat
Permissible ambient air temperature around the device	-40...60 °C 60...70 °C with derating
Operating altitude	0...3000 m
Fire resistance	850 °C conforming to IEC 60695-2-1
Flame retardance	V1 conforming to UL 94
Mechanical robustness	Vibrations contactor open (2 Gn, 5...300 Hz) Vibrations contactor closed (4 Gn, 5...300 Hz) Shocks contactor closed (15 Gn for 11 ms) Shocks contactor open (8 Gn for 11 ms)
Height	85 mm
Width	45 mm
Depth	92 mm
Product weight	0.438 kg

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1

Package 1 Height	5.500 cm
Package 1 Width	9.500 cm
Package 1 Length	12.000 cm
Package 1 Weight	456.000 g
Unit Type of Package 2	S02
Number of Units in Package 2	15
Package 2 Height	15.000 cm
Package 2 Width	30.000 cm
Package 2 Length	40.000 cm
Package 2 Weight	7.134 kg

Logistical informations

Country of origin	FR
-------------------	----

Contractual warranty

Warranty (in months)	18
----------------------	----



Environmental Data

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing “Use Better, Use Longer, Use Again” campaign to extend product lifetimes and recyclability.

[Environmental Data explained >](#)

[How we assess product sustainability >](#)



Environmental footprint

Total lifecycle Carbon footprint	20 kg CO2 eq.
Carbon footprint of the manufacturing phase [A1 to A3]	4 kg CO2 eq.
Carbon footprint of the distribution phase [A4]	0.1 kg CO2 eq.
Carbon footprint of the installation phase [A5]	0 kg CO2 eq.
Carbon footprint of the use phase [B2, B3, B4, B6]	15 kg CO2 eq.
Carbon footprint of the end-of-life phase [C1 to C4]	0.7 kg CO2 eq.
Environmental Disclosure	Product Environmental Profile

Use Better



Materials and Substances

Packaging made with recycled cardboard	Yes
Packaging without single use plastic	Yes
SCIP Number	7d699774-c34b-4bf4-9ecb-388a149eefdd
EU RoHS Directive	Compliant By Exemption
REACH Regulation	Reference contains Substances of Very High Concern above the threshold
Halogen-free status	Halogen free plastic parts & cables product

Use Longer



Lifetime extension

Repair	No
--------	----

Use Again



Repack and remanufacture

Recyclability potential, in %	70
End of life manual availability	End of Life Information
Take-back	No
WEEE Label	 The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins

Offer Marketing Illustration

Product benefits / Features



TeSys Deca Contactors

Range Accessories



Auxiliary contact block



Time delay auxiliary contact block



Mechanical interlock



Comb busbar



Assembling kits



Power connections



Contactor Coil

Offer Marketing Illustration

Product benefits / Features



The image shows a TeSys Deca Contactor, a black industrial electrical component. It has a green label with 'TeSys' and 'Schneider Electric' logos. The label also indicates 'Control' and 'LC1 D09'. The top of the unit has three screw terminals labeled '1', '2', and '3'. The bottom has four screw terminals labeled '1', '2', '3', and '4'. The unit is shown against a green circular background.

TeSys Deca Contactors

Technical Benefits

- Deca green delivers a consistent low consumption range of contactors from 9 A to 80 A.
- Covers control voltage from 24 to 250 V, with same coils for AC and DC.
- Designed to meet the requirements of industrial and HVAC applications
- With IEC60335-1 compliance, improved fire resistance, and dust-proof auxiliaries
- Suitable for safety applications thanks to mechanically linked contacts and mirror contacts
- Outstanding breaking/making capacity up to 20 In with PLC direct connection

Offer Marketing Illustration

Product benefits / Features

TeSys Deca

Contactors



Reliable

Multi-standard solutions, high reliability, long mechanical and electrical durability for different sizes, and the most complete accessories.



Energy efficiency

These electronic-coil contactors require up to 80 % less energy than electro-mechanical contactors.




Universal

Multi standards certified (IEC, UL, CSA, CCC, EAC, Marine), Green Premium compliant (RoHS/REACH).



Image of product / Alternate images

Alternative

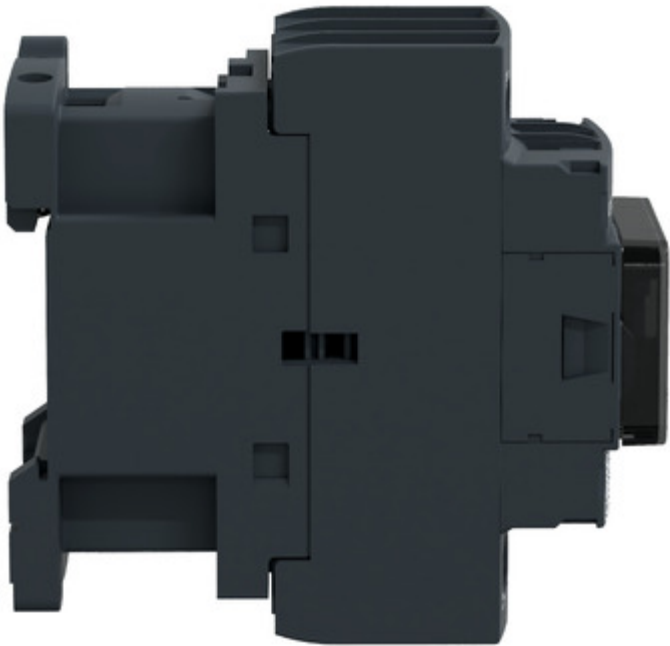

Schneider
No. 1.624. 12. 800V 32kVA
LC1D32KUE

Technical Data

Rating	1	2	3	4	5	6	7	8	9	10
Rated current I _n (A)	16	25	32	40	50	63	80	100	125	160
Rated voltage U _e (V)	220	240	250	260	270	280	290	300	310	320
Rated power P _n (kW)	1.5	2.2	3.0	3.7	4.5	5.5	6.5	7.5	8.5	9.5
Rated energy W _e (kWh)	1.5	2.2	3.0	3.7	4.5	5.5	6.5	7.5	8.5	9.5

Dimensions

Symbol	Value	Unit
A	100	mm
B	100	mm
C	100	mm
D	100	mm
E	100	mm
F	100	mm
G	100	mm
H	100	mm
I	100	mm
J	100	mm
K	100	mm
L	100	mm
M	100	mm
N	100	mm
O	100	mm
P	100	mm
Q	100	mm
R	100	mm
S	100	mm
T	100	mm
U	100	mm
V	100	mm
W	100	mm
X	100	mm
Y	100	mm
Z	100	mm

Marking

Symbol	Value	Unit
1	100	mm
2	100	mm
3	100	mm
4	100	mm
5	100	mm
6	100	mm
7	100	mm
8	100	mm
9	100	mm
10	100	mm

Notes

1. The contactor is designed for use in a controlled environment.

2. The contactor is not suitable for use in a controlled environment.

3. The contactor is not suitable for use in a controlled environment.

4. The contactor is not suitable for use in a controlled environment.

5. The contactor is not suitable for use in a controlled environment.

6. The contactor is not suitable for use in a controlled environment.

7. The contactor is not suitable for use in a controlled environment.

8. The contactor is not suitable for use in a controlled environment.

9. The contactor is not suitable for use in a controlled environment.

10. The contactor is not suitable for use in a controlled environment.

Other Information

1. The contactor is not suitable for use in a controlled environment.

2. The contactor is not suitable for use in a controlled environment.

3. The contactor is not suitable for use in a controlled environment.

4. The contactor is not suitable for use in a controlled environment.

5. The contactor is not suitable for use in a controlled environment.

6. The contactor is not suitable for use in a controlled environment.

7. The contactor is not suitable for use in a controlled environment.

8. The contactor is not suitable for use in a controlled environment.

9. The contactor is not suitable for use in a controlled environment.

10. The contactor is not suitable for use in a controlled environment.

